



# Checkweighing scale

Compact checkweighing scale and user-friendly for weight control




**FEATURES:**

- Backlight LCD display.
- Digits of 23 mm.
- ABS housing.
- Stainless steel pan.
- Pan size: 250 mm (width) x 215 mm.
- IP44 protection.
- Bubble level.
- Blister included.
- Adjustable feet in height.
- Unit 1 to choose: off, kg, t and g;
- Unit 2 to choose: off, lb, lboz;
- Unit 3 to choose: off, Taiwan Jin, CA o VISS.
- Power supply with adaptor AC/DC 230-240Vac 50Hz.
- Internal battery. 160 hours approx. battery life without backlighting (Without illumination).
- Programmable gravity.
- Unique range, multi-range or multi-interval.
- Auto switch off programmable.

**FUNCTIONS:**

- Accumulation
- Piece counting
- Zero
- Hold 4 modes: deactivate, filter for animals, peak value, stable weight and stable weigh with auto cancel in zero)
- Checkweighing function visual and alarm signals
- Three speeds of AD converter (high, medium and low)
- Gross/Net
- Tare

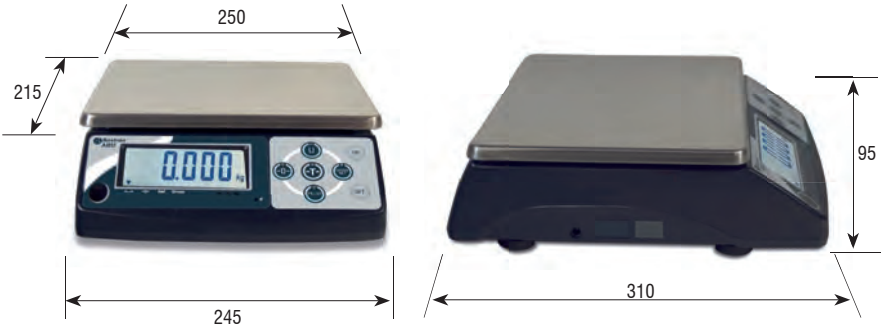

Dimensions (mm)



Function: Speed converter



Function: Hold (4 modes)

Code #	Capacity (kg)	Readout (g)	Readout CE-M (g)	Pan dimensions (mm)	Packing dimensions (mm)	Packing weight (kg)	Certifications	
							ENAC	
							Code #	
260065	0,6	0,1	-	250x215	355x290x145	3,6	900033	
260062	1,5	0,1	-	250x215	355x290x145	3,6	900033	
260064	5	1	-	250x215	355x290x145	3,6	900033	
260061	10	1	-	250x215	355x290x145	3,6	900001	
260063	20	1	-	250x215	355x290x145	3,6	900001	
261122 M	3	-	1	250x215	355x290x145	3,6	900033	
261124 M	6	-	2	250x215	355x290x145	3,6	900033	
261121 M	10	-	5	250x215	355x290x145	3,6	900001	
261123 M	20	-	10	250x215	355x290x145	3,6	900001	