
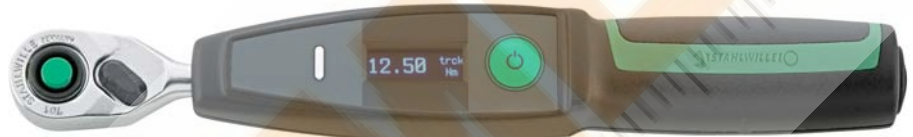


## SENSOTORK® 701 electronic torque wrench

- indicating
- slim, compact shape for smaller torques from 1 N·m upwards
- measuring units: N·m, cN·m, ft·lb, in·lb
- measurements independent of the point of application of force
- additional functions using SENSOMASTER 4 software (freely available after registration at [www.stahlwille.de/sensomaster](http://www.stahlwille.de/sensomaster)):
  - adjustable joints
  - evaluation of tightening operation by means of coloured LEDs, buzzer and vibration
- calibrating interval adjustable
- logging function
- supplied with 3.6 V lithium battery, type 14500
- calibration in conjunction with perfectControl calibrating unit No 7794 or complete calibration system No 7706. Readjustment does not require disassembly
- with certificate
- display deviation value  $\pm 4\%$

### 701/2 Electronic torque wrench with permanently installed fine-tooth ratchet

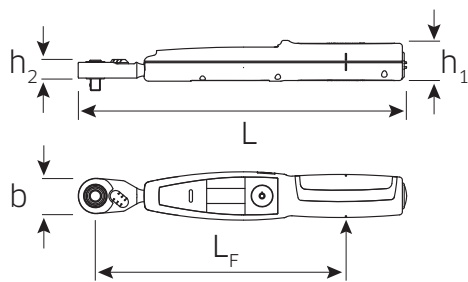

Code					"	b mm	h <sub>1</sub> mm	h <sub>2</sub> mm	L mm	L <sub>F</sub> mm	Δg g	Δg with box
<b>96 50 45 02</b>	1-20 N·m	100-2000 cN·m	0.7-15 ft·lb	9-180 in·lb	1/4	22.6	26	10	210	160	145	710



### Note!

Torque tightening tools are measuring instruments. They must be regularly calibrated with suitable instruments and adjusted accordingly (see DIN EN ISO 6789, 5.3 Recalibrating).