




0780 Bench centres

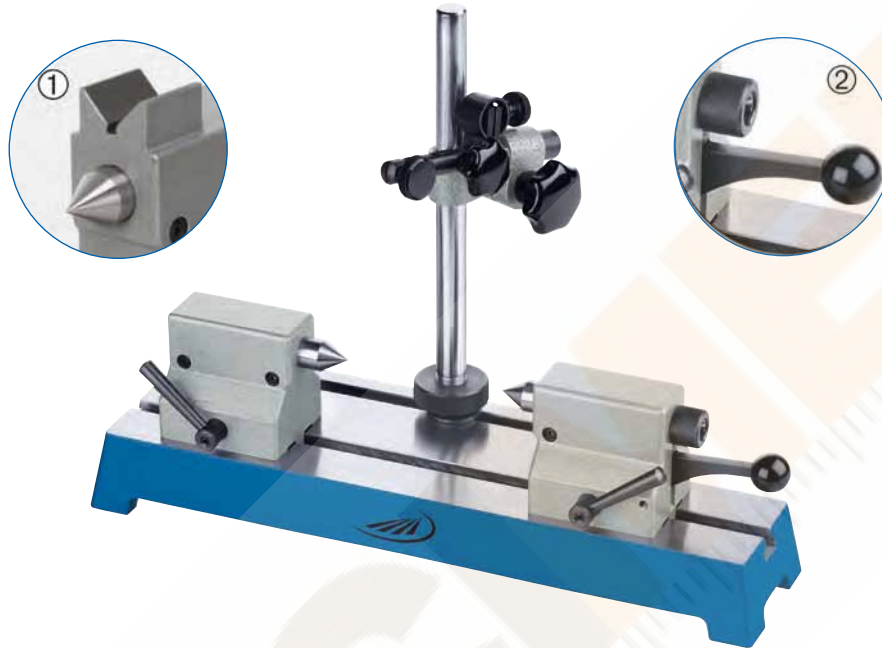

Model

- Finely ground surface, flatness tolerance according to DIN 876-2
- With two adjustable tailstocks
- Left tailstock with fixed centre
- Right tailstock with retractable spring mounted centre, free lift appr. 10 mm

Delivery

- Tailstocks can be clamped via an eccentric clamp
- Tailstock height 75 mm with integrated V-groove support
- Quick-clamping device by clamping lever
- With T-groove and support column
- With mounting hole for dial gauges \varnothing 8 mm

- Cardboard box

▶◀	☰	Height of centers	Workpiece load	Distance between centres	Center dia.	T-groove width	Base	Order no.	List price
		mm	p. tailstock max. kg	mm	mm	mm	mm		EUR
		50	5	200	16	10H7	350 x 110	0780 101	605.00
		50	5	350	16	10H7	500 x 110	0780 102	768.00
		75	5	200	16	10H7	350 x 110	0780 104*	692.00
		75	5	350	16	10H7	500 x 110	0780 105*	788.00
	▪	100	20	450	22	12H7	700 x 180	0780 107	1984.00
	▪	150	20	450	22	12H7	700 x 180	0780 108	2212.00

* With integrated V-groove support on the tailstocks for \varnothing 6 - 24 mm

Accessories

	Order no.	List price EUR
Replacement centre, retractable, \varnothing 16 mm (50 - 75 mm)	0780 174	49.00
Replacement centre, fixed, \varnothing 16 mm (50 - 75 mm)	0780 175	39.00
Replacement centre, retractable, \varnothing 22 mm (100 - 150 mm)	0780 177	125.00
Replacement centre, fixed, \varnothing 22 mm (100 - 150 mm)	0780 178	115.00