



## WIRELESS DIGITAL CALIPERS

ATTENTION: THE WORKING LIFE OF A BATTERY IS ABOUT 3-5 MONTHS


2

**INSPECTION CERTIFICATE**  
TRACEABLE TO DKD

receiver (optional)

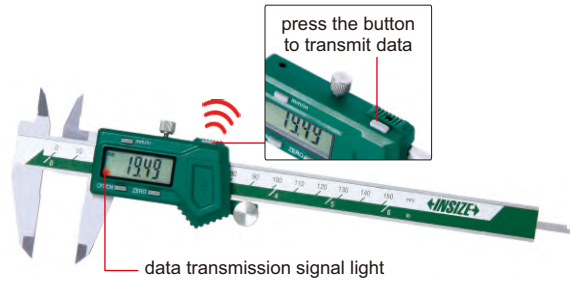


1113-150

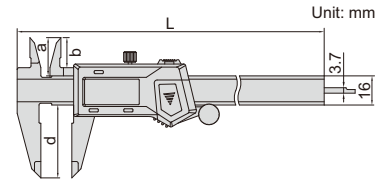

- Built-in wireless data transmission module, Zigbee signal
- Transmission distance is 6 meter (under the condition of no obstruction and no electromagnetic interference)
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, data transmission
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: receiver (code 7315-2/3/6/7/8)

Code	Range	Accuracy	L	a	b	d
1113-150*	0-150mm/0-6"	±0.03mm	236	21	16	40
1113-200*	0-200mm/0-8"	±0.03mm	286	24	19	50
1113-300*	0-300mm/0-12"	±0.03mm	400	25	20.5	60

\*Supplied with manufacturer inspection certificate traceable to DKD Germany

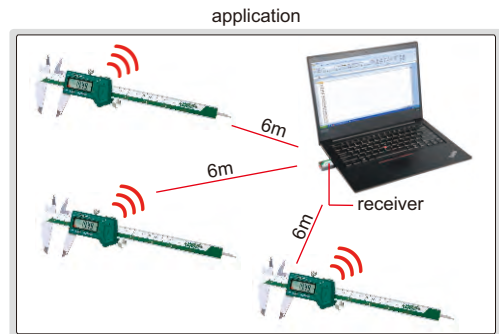

## IP67 WATERPROOF DIGITAL CALIPERS

ATTENTION: IT IS NECESSARY TO SET ZERO AFTER POWER ON EACH TIME


ATTENTION: NO DATA OUTPUT

**IP67 WATERPROOF**

**INSPECTION CERTIFICATE**  
TRACEABLE TO DKD



1118-150B

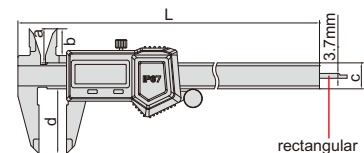


type B

- IP67 dust/waterproof
- Resolution: 0.01mm/0.0005"
- Button function: zero, on/off, mm/inch, ABS/REL, hold
- Battery CR2032
- Meet DIN862
- Made of stainless steel



1118-150R

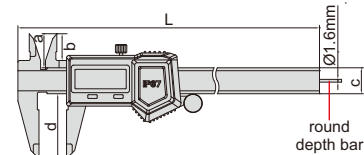

type R

Code	Range	Accuracy	Type	L	a	b	c	d
1118-150B*	0-150mm/0-6"	±0.03mm	B	236mm	21mm	16mm	16mm	40mm
1118-200B*	0-200mm/0-8"	±0.03mm	B	286mm	24mm	19mm	16mm	50mm
1118-300B*	0-300mm/0-12"	±0.03mm	B	400mm	25mm	20.5mm	16mm	60mm
1118-150R*	0-150mm/0-6"	±0.03mm	R	236mm	21mm	16mm	16mm	40mm

\*Supplied with manufacturer inspection certificate traceable to DKD Germany