





JEWELLED BEARING

- Meet DIN2270 (except **2380-02, 2381-02, 2381-021**)
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 182)



2380-08

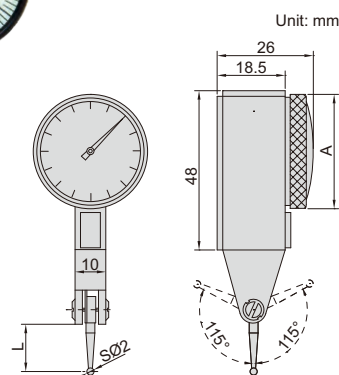


Code	Range	Graduation	Accuracy	Hysteresis	Dial reading	A	L
<b>2380-08*</b>	0.8mm	0.01mm	13µm	3µm	0-40-0	Ø30	13.5
<b>2381-08*</b>	0.8mm	0.01mm	13µm	3µm	0-40-0	Ø37	13.5
<b>2380-02*</b>	0.2mm	0.002mm	6µm	2µm	0-100-0	Ø30	12.5
<b>2381-02*</b>	0.2mm	0.002mm	6µm	2µm	0-100-0	Ø37	12.5
<b>2381-021*</b>	0.2mm	0.001mm	6µm	2µm	0-100-0	Ø37	12.5

\* Supplied with manufacturer inspection certificate traceable to NIST USA




JEWELLED BEARING

- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: 5/32" DIA and 3/8" DIA



2380-31




Code	Range	Graduation	Accuracy	Dial reading	A	L
<b>2380-31*</b>	0.03"	0.001"	±0.001"	0-15-0	1.181" DIA	0.50"
<b>2380-35*</b>	0.03"	0.0005"	±0.0005"	0-15-0	1.181" DIA	0.50"
<b>2380-301*</b>	0.008"	0.0001"	±0.0001"	0-40-0	1.181" DIA	0.563"
<b>2381-31*</b>	0.03"	0.001"	±0.001"	0-15-0	1.457" DIA	0.50"
<b>2381-35*</b>	0.03"	0.0005"	±0.0005"	0-15-0	1.457" DIA	0.50"
<b>2381-301*</b>	0.008"	0.0001"	±0.0001"	0-40-0	1.457" DIA	0.563"

\* Supplied with manufacturer inspection certificate traceable to NIST




JEWELLED BEARING

- Meet DIN2270
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter Ø4mm and Ø8mm
- Optional accessory: styli (page 182)



2398-08



Code	Range	Graduation	Accuracy	Hysteresis	Dial reading
<b>2398-08*</b>	0.8mm	0.01mm	13µm	3µm	0-40-0

\* Supplied with manufacturer inspection certificate traceable to NIST USA