

DATA  
OUTPUT

# UNIVERSAL CALIPERS


working with stands



working with measuring jaws



1125-600



- Buttons: on/off, set, mm/inch, ABS, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel

With data interface (data output cable code 7315-22, 7302-22, optional)

| Code     | Range *       | Resolution     | Accuracy |
|----------|---------------|----------------|----------|
| 1125-600 | 0-600mm/0-24" | 0.01mm/0.0005" | ±0.05mm  |



\*The range changes according to different points

Built-in wireless (receiver code 7315-2/3/6/7/8 is required)


| Code       | Range *       | Resolution     | Accuracy |
|------------|---------------|----------------|----------|
| 1125-600WL | 0-600mm/0-24" | 0.01mm/0.0005" | ±0.05mm  |

\*The range changes according to different points

## Half disk points (included)

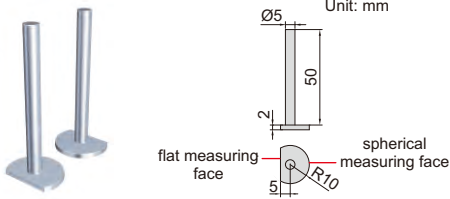


Measuring external groove diameter with flat measuring face (depth  $h1 \leq 2.5\text{mm}$ )




Measuring internal groove diameter with spherical measuring face (depth  $h2 \leq 7.5\text{mm}$ )

## Conical points (optional)

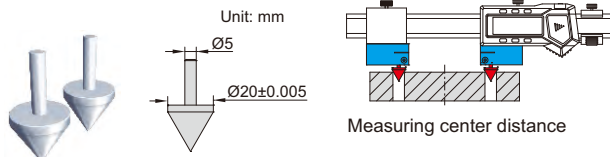


Code  
1125-T101

## Round shoulder points (optional)

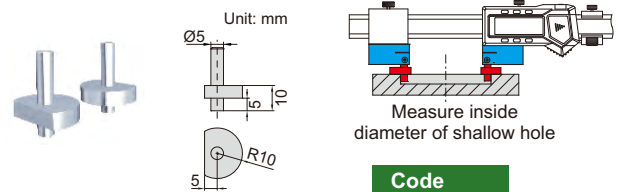


Code  
1125-T102

## Flat shoulder points (optional)

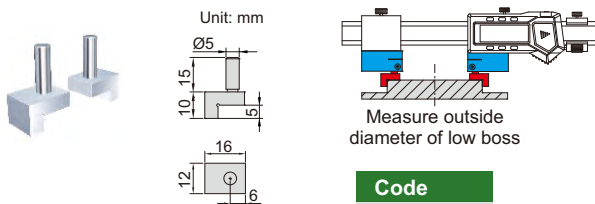


Code  
1125-T103

## Spherical points (included)

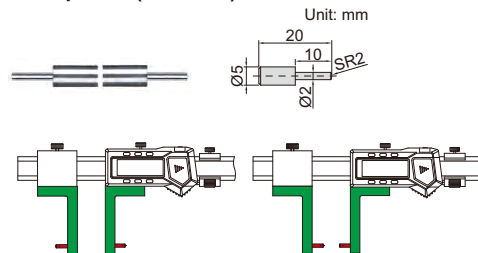


## Point sleeve (optional)

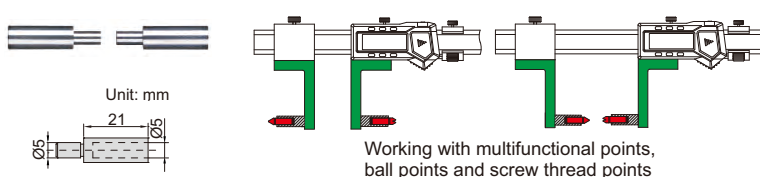

Code  
1125-T104

## Stands (included)

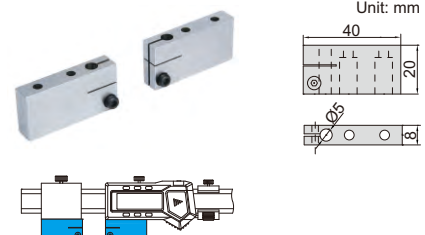

To be continued