



Continued from previous page

2


### Depth stop (included)

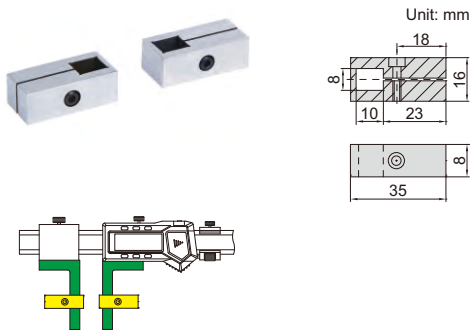

### Measuring jaws (included)

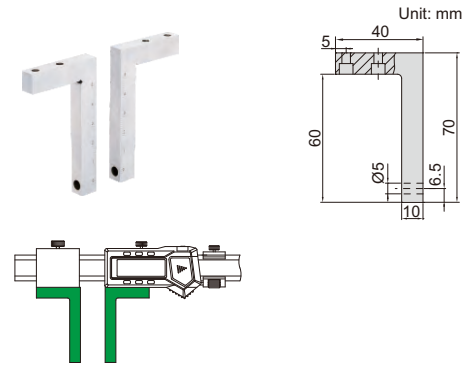

### Multifunctional points 7392\* (optional, page 30)



### Ball points 7391\* (optional, page 30)



### Screw thread points 7381\*, 7321\* (optional, page 30)




\* It is necessary to use point sleeve (code 1125-T104) for these points

## DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS




DATA OUTPUT

preset buttons

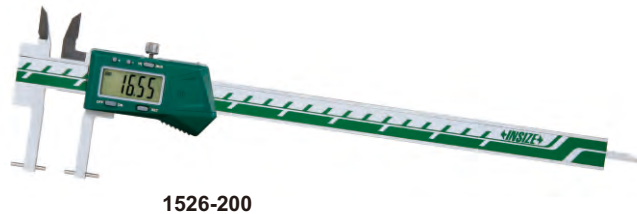

1526-200

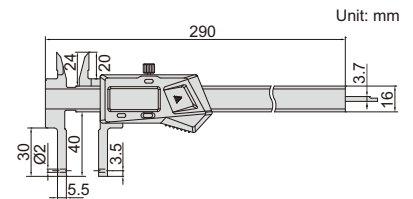

- Supplied with 3 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points

### short spherical points (included) Unit: mm



### long spherical/flat points (included) Unit: mm



### spherical blade points (included) Unit: mm



### With data interface

Code	Data output cable (optional)
1526-200	code 7315-21, 7302-21

### Built-in wireless

Code	Receiver (optional)
1526-200WL	code 7315-2/3/6/7/8

Point	Range	Accuracy	Application
short spherical points	12-212mm/0.5-8.5" (internal)	±0.03mm	for grooves inside small hole
long spherical/flat points	24-224mm/1-8.8" (internal) 0-187mm/0-7.5" (external)	±0.03mm	spherical points for grooves inside hole flat points for external grooves
spherical blade points	24-224mm/1-8.8" (internal) 0-187mm/0-7.5" (external)	±0.03mm	for narrow grooves inside hole

To be continued