


DIGITAL INSIDE GROOVE CALIPERS

2

depth stop 6143
(optional)



- Measure groove diameter
- Resolution: 0.01mm/0.0005"
- Buttons type A: on/off, set, mm/inch, preset (+, -)
type B: on/off, zero, mm/inch
type C: on/off, zero, mm/inch, ABS/REL, hold
- Battery CR2032
- Made of stainless steel
- Optional accessory: depth stop
(code 6143, for calipers with c=16mm)

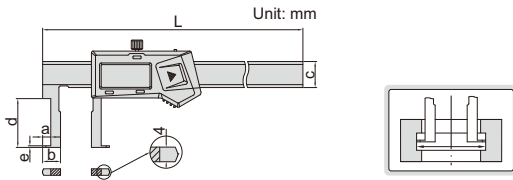

preset buttons



1120-150A
type A



1120-150B
type B



1120-150P
type C

No dust/waterproof, preset (no need to add the width of the jaws on the reading), with data interface

(mm)

| Code | Range | Type | Accuracy | L | a | b | c | d | e | Data output cable (optional) |
|-----------|-------------------|------|----------|-----|----|------|----|-----|-----|------------------------------|
| 1120-150A | 22-150mm/0.87-6" | A | ±0.04mm | 250 | 5 | 11 | 16 | 30 | 1 | 7315-21, 7302-21 |
| 1120-1501 | 35-150mm/1.38-6" | A | ±0.06mm | 250 | 6 | 17.5 | 16 | 60 | 1.5 | 7315-21, 7302-21 |
| 1120-200A | 25-200mm/0.98-8" | A | ±0.04mm | 310 | 5 | 12.5 | 16 | 40 | 1 | 7315-21, 7302-21 |
| 1120-2001 | 40-200mm/1.57-8" | A | ±0.06mm | 310 | 7 | 20 | 16 | 70 | 2.5 | 7315-21, 7302-21 |
| 1120-300A | 30-300mm/1.18-12" | A | ±0.05mm | 410 | 5 | 15 | 16 | 50 | 1.5 | 7315-21, 7302-21 |
| 1120-3001 | 50-300mm/1.97-12" | A | ±0.07mm | 410 | 8 | 25 | 16 | 80 | 2.5 | 7315-21, 7302-21 |
| 1120-500 | 40-500mm/1.57-20" | A | ±0.07mm | 680 | 5 | 20 | 24 | 90 | 2.2 | 7315-22, 7302-22 |
| 1120-5001 | 60-500mm/2.36-20" | A | ±0.08mm | 680 | 10 | 30 | 24 | 120 | 3.4 | 7315-22, 7302-22 |
| 1120-5002 | 80-500mm/3.15-20" | A | ±0.08mm | 680 | 16 | 40 | 24 | 150 | 5.2 | 7315-22, 7302-22 |

No dust/waterproof, preset (no need to add the width of the jaws on the reading),
built-in wireless (receiver code 7315-2/3/6/7/8 is required)

| Code | Range | Type | Accuracy | L | a | b | c | d | e |
|-------------|-------------------|------|----------|-------|------|--------|------|-------|-------|
| 1120-150AWL | 22-150mm/0.87-6" | A | ±0.04mm | 250mm | 5mm | 11mm | 16mm | 30mm | 1mm |
| 1120-1501WL | 35-150mm/1.38-6" | A | ±0.06mm | 250mm | 6mm | 17.5mm | 16mm | 60mm | 1.5mm |
| 1120-200AWL | 25-200mm/0.98-8" | A | ±0.04mm | 310mm | 5mm | 12.5mm | 16mm | 40mm | 1mm |
| 1120-2001WL | 40-200mm/1.57-8" | A | ±0.06mm | 310mm | 7mm | 20mm | 16mm | 70mm | 2.5mm |
| 1120-300AWL | 30-300mm/1.18-12" | A | ±0.05mm | 410mm | 5mm | 15mm | 16mm | 50mm | 1.5mm |
| 1120-3001WL | 50-300mm/1.97-12" | A | ±0.07mm | 410mm | 8mm | 25mm | 16mm | 80mm | 2.5mm |
| 1120-500WL | 40-500mm/1.57-20" | A | ±0.07mm | 680mm | 5mm | 20mm | 24mm | 90mm | 2.2mm |
| 1120-5001WL | 60-500mm/2.36-20" | A | ±0.08mm | 680mm | 10mm | 30mm | 24mm | 120mm | 3.4mm |
| 1120-5002WL | 80-500mm/3.15-20" | A | ±0.08mm | 680mm | 16mm | 40mm | 24mm | 150mm | 5.2mm |

No dust/waterproof, no preset (need to add the width of the jaws on the reading)

| Code | Range | Type | Accuracy | L | a | b | c | d | e |
|-----------|-------------------|------|----------|-------|------|------|------|-------|-------|
| 1120-150B | 50-150mm/1.97-6" | B | ±0.06mm | 270mm | 8mm | 25mm | 20mm | 90mm | 3.4mm |
| 1120-200B | 60-200mm/2.36-8" | B | ±0.06mm | 320mm | 10mm | 30mm | 20mm | 100mm | 3.4mm |
| 1120-300B | 60-300mm/2.36-12" | B | ±0.07mm | 420mm | 10mm | 30mm | 20mm | 110mm | 3.4mm |

IP67 dust/waterproof, no automatic power off, set zero after power on each time,
no preset (need to add the width of the jaws on the reading), without data interface

| Code | Range | Type | Accuracy | L | a | b | c | d | e |
|-----------|------------------|------|----------|-------|-----|------|------|------|-----|
| 1120-150P | 22-150mm/0.87-6" | C | ±0.04mm | 250mm | 5mm | 11mm | 16mm | 30mm | 1mm |