

BUILT-IN BLUETOOTH IP67 WATERPROOF DIGITAL DEPTH GAGES

BLUETOOTH

IP67
WATERPROOF

ATTENTION: WHEN POWER ON 8 HOURS AFTER SHUTDOWN, IT IS NECESSARY TO SET ZERO


3

ATTENTION: THE WORKING LIFE OF A BATTERY IS ABOUT 4-6 MONTHS

- Built-in bluetooth 4.0 wireless transmission module, connect with computers (with bluetooth receiver), mobile phones, tablets, etc., and output keyboard signals
- Transmission distance is 10 meters (under the condition of no obstruction and no electromagnetic interference)
- IP67 dust/waterproof
- Resolution: 0.01mm/0.0005"
- Large display
- Button function: zero, on/off, mm/inch, data transmission
- Battery CR2032, automatic power off
- Meet DIN862
- Made of stainless steel



1542-150

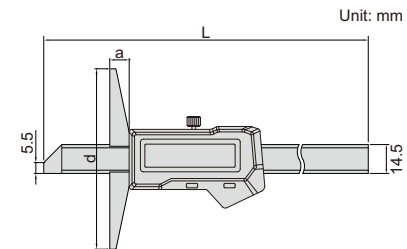

| Code | Range | Accuracy | L | a | d |
|----------|---------------|----------|---------|--------|-------|
| 1542-150 | 0-150mm/0-6" | ±0.03mm | 232.5mm | 11mm | 100mm |
| 1542-200 | 0-200mm/0-8" | ±0.03mm | 285mm | 11mm | 100mm |
| 1542-300 | 0-300mm/0-12" | ±0.03mm | 390mm | 13.5mm | 150mm |


DIGITAL DEPTH GAGES (STANDARD TYPE)

DATA
OUTPUT

- Buttons: on/off, zero, mm/inch
- Automatic power off, move the digital unit to turn on power
- Meet DIN862 (except 0-500mm/0-20", 0-1000mm/0-40", 0-1500mm/0-60")
- Battery CR2032
- Made of stainless steel



1141-150A



With data interface

| Code | Range | Resolution | Accuracy | L | a | b | d | Data output cable (optional) |
|-------------|----------------|----------------|----------|--------|-----|--------|-------|------------------------------|
| 1141-150A | 0-150mm/0-6" | 0.01mm/0.0005" | ±0.03mm | 230mm | 6mm | 14.5mm | 100mm | 7315-21, 7302-21 |
| 1141-200A | 0-200mm/0-8" | 0.01mm/0.0005" | ±0.03mm | 280mm | 6mm | 14.5mm | 100mm | 7315-21, 7302-21 |
| 1141-300A | 0-300mm/0-12" | 0.01mm/0.0005" | ±0.03mm | 380mm | 6mm | 14.5mm | 150mm | 7315-21, 7302-21 |
| 1141-500A | 0-500mm/0-20" | 0.01mm/0.0005" | ±0.05mm | 585mm | 7mm | 15mm | 150mm | 7315-21, 7302-21 |
| 1141-5001A | 0-500mm/0-20" | 0.01mm/0.0005" | ±0.05mm | 585mm | 7mm | 15mm | 200mm | 7315-21, 7302-21 |
| 1141-1000A | 0-1000mm/0-40" | 0.01mm/0.0005" | ±0.07mm | 1188mm | 7mm | 18mm | 150mm | 7315-22, 7302-22 |
| 1141-10001A | 0-1000mm/0-40" | 0.01mm/0.0005" | ±0.07mm | 1188mm | 7mm | 18mm | 200mm | 7315-22, 7302-22 |
| 1141-10002A | 0-1000mm/0-40" | 0.01mm/0.0005" | ±0.07mm | 1188mm | 7mm | 18mm | 250mm | 7315-22, 7302-22 |
| 1141-10003A | 0-1000mm/0-40" | 0.01mm/0.0005" | ±0.07mm | 1188mm | 7mm | 18mm | 300mm | 7315-22, 7302-22 |
| 1141-1500A | 0-1500mm/0-60" | 0.01mm/0.0005" | ±0.11mm | 1695mm | 7mm | 18mm | 200mm | 7315-22, 7302-22 |

Built-in wireless (receiver code 7315-2/3/6/7/8 is required)

| Code | Range | Resolution | Accuracy | L | a | b | d |
|--------------|---------------|----------------|----------|-------|-----|--------|-------|
| 1141-150AWL | 0-150mm/0-6" | 0.01mm/0.0005" | ±0.03mm | 230mm | 6mm | 14.5mm | 100mm |
| 1141-200AWL | 0-200mm/0-8" | 0.01mm/0.0005" | ±0.03mm | 280mm | 6mm | 14.5mm | 100mm |
| 1141-300AWL | 0-300mm/0-12" | 0.01mm/0.0005" | ±0.03mm | 380mm | 6mm | 14.5mm | 150mm |
| 1141-500AWL | 0-500mm/0-20" | 0.01mm/0.0005" | ±0.05mm | 585mm | 7mm | 15mm | 150mm |
| 1141-5001AWL | 0-500mm/0-20" | 0.01mm/0.0005" | ±0.05mm | 585mm | 7mm | 15mm | 200mm |