

4



ANALYTICAL BALANCES

Quick-Finder Analytical Balances

Readability	Weighing capacity	Model	Page								
[d] mg	[Max] g	KERN		For an explanation on the pictos, see the front flap							
0,01 0,1	42 120	ABT 120-5DNM	48	1	○	●		●	●		●
0,01 0,1	52 120	ABP 100-5DM	50	1	○	●		●	●		●
0,01 0,1	52 120	ABP 100-5DAM	52	1	○	●		●	●		●
0,01 0,1	82 220	ALJ 200-5DA	44	1		●		●	●		●
0,01 0,1	82 220	ABT 220-5DNM	48	1	○	●		●	●		●
0,01 0,1	102 220	ABP 200-5DM	50	1	○	●		●	●		●
0,01 0,1	102 220	ABP 200-5DAM	52	1	○	●		●	●		●
0,01	101	ABT 100-5NM	48	1	○	●		●	●		●
0,01	135	ABP 100-5M	50	1	○	●		●	●		●
0,01	135	ABP 100-5AM	52	1	○	●		●	●		●
0,01	210	ALJ 210-5A	44	1		●		●	●		●
0,01	220	ABP 200-5AM	52	1	○	●		●	●		●
0,01	220	ABP 200-5M	50	1	○	●		●	●		●
0,1	82	ACS 80-4	46	1			●	●		●	●
0,1	82	ACJ 80-4M	46	1	○	●		●		●	●
0,1	120	ACS 100-4	46	1			●	●		●	●
0,1	120	ACJ 100-4M	46	1	○	●		●		●	●
0,1	120	ABT 120-4NM	48	1	○	●		●	●		●
0,1	120	ABP 100-4M	50	1	○	●		●	●		●
0,1	120	ADB 600-C3	43	1			●	●		●	
0,1	120	ADB 100-4	43	1			●	●		●	
0,1	120	ADJ 600-C3	43	1		●		●		●	
0,1	120	ADJ 100-4	43	1		●		●		●	
0,1	160	ALS 160-4A	44	1			●	●	●		●
0,1	160	ALJ 160-4A	44	1		●		●	●		●
0,1	160	ALJ 160-4AM	44	1	○	●		●	●		●
0,1	220	ADJ 200-4	43	1		●		●		●	
0,1	220	ACS 200-4	46	1			●	●		●	●
0,1	220	ACJ 200-4M	46	1	○	●		●		●	●
0,1	220	ABT 220-4NM	48	1	○	●		●	●		●
0,1	220	ABP 200-4M	50	1	○	●		●	●		●
0,1	220	ABP 200-4AM	52	1	○	●		●	●		●
0,1	220	ADB 200-4	43	1			●	●		●	
0,1	250	ALS 250-4A	44	1			●	●	●		●
0,1	250	ALJ 250-4A	44	1		●		●	●		●
0,1	250	ALJ 250-4AM	44	1	○	●		●	●		●
0,1	310	ALJ 310-4A	44	1		●		●	●		●
0,1	320	ACS 300-4	46	1			●	●		●	●
0,1	320	ACJ 300-4M	46	1	○	●		●		●	●
0,1	320	ABT 320-4NM	48	1	○	●		●	●		●
0,1	320	ABP 300-4M	50	1	○	●		●	●		●
0,1	320	ABP 300-4AM	52	1	○	●		●	●		●
0,1	510	ALJ 500-4A	44	1		●		●	●		●

= Carat balance

● Standard ○ Option



The price leader in analytical balances, with internal or external adjustment

Features

- KERN ADJ: Automatic internal adjustment in the case of a change in temperature $\geq 2\text{ }^{\circ}\text{C}$ or timecontrolled every 3 h, guarantees high degree of accuracy and makes the balance independent of its location of use
- KERN ADB: Adjusting program CAL for quick setting of the balance accuracy using an external test weight at an additional price, see *Test Weights*
- Glass draught shield with 3 sliding doors for easy access to the items being weighed. standard
- **1** ADB 600-C3/ADJ 600-C3: Compact, space-saving carat balances with a readout of 0.001 ct and a weighing range of 600 ct. The high level of accuracy saves hard cash wherever you are weighing valuable precious stones
- Level indicator and levelling feet for precise levelling of the scale, fitted as standard, to give the most accurate weighing result
- Simple and convenient 6-key operation

Technical data

- Large backlit LCD display, Digit height 16 mm
- Dimensions weighing surface, stainless steel, $\varnothing 90\text{ mm}$
- Weighing space W×D×H
KERN ADB-C/ADJ-C: 170×160×110 mm
KERN ADB/ADJ: 170×160×205 mm
- Permissible ambient temperature 10 °C/30 °C

Accessories

- **2** Set for density determination of liquids and solids with density $\leq/\geq 1$, the density is indicated directly on the display, KERN YDB-03
- **3** Ioniser to neutralise electrostatic charge, KERN YBI-01A
- **4** Gemstones plate, aluminium with practical spout, W×D×H 130×80×30 mm, KERN AEJ-A05
- **5** Weighing table to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03
- Minimum weight of sample, smallest weight to be weighed, depending on the required process accuracy, only in combination with a DAkkS calibration certificate, KERN 969-103
- Equipment qualification: compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ)
- Further details, plenty of further accessories and suitable printers see *Accessories*

STANDARD

CAL INT
ADB

CAL EXT
ADB

RS 232

GLP
PRINTER

PCS

%
PERCENT

UNIT

B
MULTI

N
FORCE


1 DAY

OPTION


DAkkS
+3 DAYS

Model	Weighing capacity [Max]	Readability [d]	Reproducibility	Linearity	Overall dimensions W×D×H mm	Net weight kg	Options DAkkS Calibr. Certificate DAkkS KERN
KERN	g	mg	mg	mg			
ADB 100-4	120	0,1	0,2	± 0,4	230×310×330	4,4	963-101
ADB 200-4	220	0,1	0,2	± 0,4	230×310×330	4,4	963-101
ADB 600-C3	600 ct	0,001 ct	0,002 ct	± 0,004 ct	230×310×210	3,8	963-101
ADJ 100-4	120	0,1	0,2	± 0,4	230×310×330	5,0	963-101
ADJ 200-4	220	0,1	0,2	± 0,4	230×310×330	5,0	963-101
ADJ 600-C3	600 ct	0,001 ct	0,002 ct	± 0,004 ct	230×310×210	4,6	963-101



KERN ALJ 200-5DA with optional ioniser , see *accessories*. High-precision semi-micro analytical balance. Thanks to its high level of precision, it is ideal for calibrating pipettes
Note: To prevent evaporation we recommend economical capillary tubes (see standard 8655)

Analytical balances with a large weighing range, graphics display and user-friendly recipe weighing function – also as single-range semi-micro balance with unbelievably high resolution

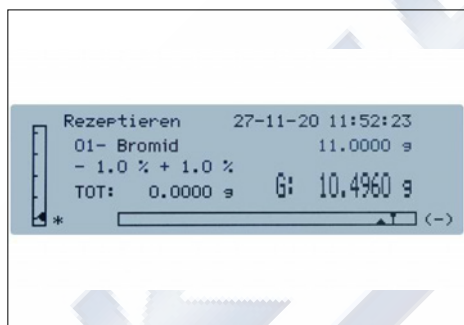

Convenient recipe-weighing: with the recipe database, up to 99 recipes can be stored, each with up to 20 recipe ingredients with name and target value



Clear printout with date and time. In addition, the components of the mixture are numbered automatically and printed out with the name and weight



GLP/ISO record keeping: professional, detailed GLP Protocol, so that the balance is completely compliant with the relevant standard requirements in accordance with ISO, GLP and GMP



Features

- ALJ 210-5A: Semi-micro model with just one weighing range with unbelievably high resolution, ideal where heavy items need to be weighed with the most accurate readout across the entire weighing range. **1** Particularly advantageous: the ioniser KERN ALJ-A03 for neutralising electrostatic charge is already fitted as standard
- Rapid and efficient operation thanks to the graphics display. Simple, clear user interface on the display in the following languages: DE, EN, FR, IT, ES, PT
- KERN ALJ: Automatic internal adjustment, guarantees high degree of accuracy and makes the balance independent of its location of use
- KERN ALS: Adjusting program CAL for quick setting of the balance accuracy using an external test weight at an additional price, see *Test Weights*
- Short stabilisation time: steady weight values within approx. 4 s (Models with [d] = 0,1 mg) 10 s; 6 s (Models with [d] = 0,01 | 0,1 mg) under laboratory conditions
- Weighing with tolerance range (checkweighing): Input of an upper/lower limit value. A visual signal assists with portioning, dispensing or grading
- Dosage aid: High stability mode and other filter settings can be selected

- Internal memory for complete recipes with name and target value of the recipe ingredients. User guidance through display
- Ergonomically optimised keypad for left and righthanded users
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed. Weighing space W×D×H 160×170×225 mm
- Compact size, practical for small spaces
- Protective working cover included with delivery

Technical data

- Backlit LCD graphic display, digit height 15 mm
- Dimensions weighing surface, stainless steel, Ø 80 mm
- Overall dimensions W×D×H 210×340×330 mm
- Net weight approx. 7 kg
- Permissible ambient temperature 5 °C/35 °C

Accessories

- Protective working cover, scope of delivery 5 items, KERN ALJ-A01S05
- Protective dust cover, KERN ABS-A08
- 1** Evaporation trap, minimises faults through evaporation when using pipettes for small volumes of 10 µl to 10 ml, KERN ALJ-A02
- 2** Draught shield rear panel with integrated ioniser to neutralise electrostatic charge. Particularly convenient handling as you no longer need a separate device. Simply enable the ionizer fan at the push of a button.. Is fitted in place of the existing glass rear panel of the draught shield. Please order at the time you order your balance, the scope of delivery is the rear panel, ionizer, Universal plug-in power supply. Factory Option, KERN ALJ-A03
- 3** Set for density determination of liquids and solids with density ≤/≥ 1, the density is indicated directly on the display, KERN YDB-03
- Weighing table to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03
- Equipment qualification: compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ)
- Further details, plenty of further accessories and suitable printers see *Accessories*

STANDARD



OPTION



FACTORY



Model	Weighing capacity [Max] g	Readability [d] mg	Verification value [e] mg	Minimal load [Min] mg	Reproducibility mg	Linearity mg	Verification	Options
KERN								DAkKS Calibr. Certificate
ALS 160-4A	160	0,1	-	-	0,1	± 0,3	-	DAkKS KERN
ALS 250-4A	250	0,1	-	-	0,1	± 0,3	-	963-101
ALJ 210-5A	210	0,01	-	-	0,05	± 0,1	-	963-101
ALJ 160-4A	160	0,1	-	-	0,1	± 0,3	-	963-101
ALJ 250-4A	250	0,1	-	-	0,1	± 0,3	-	963-101
ALJ 310-4A	310	0,1	-	-	0,1	± 0,3	-	963-101
ALJ 500-4A	510	0,1	-	-	0,2	± 0,4	-	963-101
Multi-range balance, with increasing load it switches automatically to the next largest weighing range [Max] and readout [d] and when the load is fully removed, the balance switches back to the lower range								
ALJ 200-5DA	82 220	0,01 0,1	-	-	0,04 0,1	± 0,1 0,2	-	963-101
Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.								
ALJ 160-4AM	160	0,1	1	10	0,1	± 0,3	965-201	963-101
ALJ 250-4AM	250	0,1	1	10	0,1	± 0,3	965-201	963-101

1 ONLY WHILE STOCKS LAST

Order Hotline: Go to back page of catalogue



USB data interfaces and RS-232 for transferring weighing data to the PC, tablet, printer or USB

The bestseller in analytical balances, with high-quality single-cell weighing system, verification optional

Features

- KERN ACJ: Automatic internal adjustment in the case of a change in temperature \geq or timecontrolled every , guarantees high degree of accuracy and makes the balance independent of its location of use
- KERN ACS: Adjusting program CAL for quick setting of the balance accuracy using an external test weight at an additional price, see *Test Weights*
- Dosage aid: High stability mode and other filter settings can be selected
- Simple recipe weighing and documenting with a combined tare/print function. In addition, the ingredients for the recipe are numbered automatically and printed out with their corresponding number and nominal weight
- Automatic data output to the PC/printer each time the balance is steady
- Identification number: 4 digits, printed on calibration protocol freely programmable
- Protective working cover included with delivery



Technical data

- Large LCD display, digit height 14 mm
- Dimensions weighing surface, stainless steel, \varnothing 91 mm
- Weighing space W×D×H 174×162×227 mm
- Overall dimensions W×D×H 213×333×338 mm
- Net weight approx. 7 kg
- Permissible ambient temperature 10 °C/30 °C

Accessories

- Protective working cover, scope of delivery 5 items, KERN ACS-A02S05
- **1** Set for density determination of liquids and solids with density $\leq/\geq 1$, the density is indicated directly on the display, KERN YDB-03
- **2** Ioniser to neutralise electrostatic charge, KERN YBI-01A
- **3** Weighing table to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03
- Minimum weight of sample, smallest weight to be weighed, depending on the required process accuracy, only in combination with a DAkkS calibration certificate, KERN 969-103
- Equipment qualification: compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ)
- Further details, plenty of further accessories and suitable printers see *Accessories*



4 Single-cell advanced technology:

- Fully automatic manufactured weighing cell from one piece of material
- Stable temperature behaviour
- Short stabilisation time: steady weight values within approx. 3 s under laboratory conditions
- Shock proof construction
- High corner load performance

STANDARD



OPTION



FACTORY



Model	Weighing capacity [Max]	Readability	Verification value	Minimal load	Reproducibility	Linearity	Verification	Options DAkkS Calibr. Certificate
	g	[d] mg	[e] mg	[Min] mg	mg	mg	MI KERN	DAkkS KERN
KERN								
ACS 80-4	82	0,1	-	-	0,2	± 0,3	-	963-101
ACS 100-4	120	0,1	-	-	0,2	± 0,3	-	963-101
ACS 200-4	220	0,1	-	-	0,2	± 0,3	-	963-101
ACS 300-4	320	0,1	-	-	0,2	± 0,3	-	963-101

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order.

The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

ACJ 80-4M	82	0,1	1	10	0,2	± 0,3	965-201	963-101
ACJ 100-4M	120	0,1	1	10	0,2	± 0,3	965-201	963-101
ACJ 200-4M	220	0,1	1	10	0,2	± 0,3	965-201	963-101
ACJ 300-4M	320	0,1	1	10	0,2	± 0,3	965-201	963-101

4



The premium model with single-cell weighing system

Features

- Automatic internal adjustment in the case of a change in temperature $\geq 0,5\text{ }^{\circ}\text{C}$ or timecontrolled every 4 h, guarantees high degree of accuracy and makes the balance independent of its location of use
- Dosage aid: High stability mode and other filter settings can be selected
- Simple recipe weighing and documenting with a combined tare/print function. In addition, the ingredients for the recipe are numbered automatically and printed out with their corresponding number and nominal weight
- Identification number: 4 digits, printed on calibration protocol freely programmable
- Printout of a GLP-compliant calibration report conveniently at the touch of a button
- Automatic data output to the PC/printer each time the balance is steady

- Large glass draught shield with 3 sliding doors for easy access to the items being weighed.
- Protective working cover included with delivery

Technical data

- Large LCD display, digit height 14 mm
- Dimensions weighing surface \varnothing 80 mm, stainless steel
- Weighing space W×D×H 168×172×223 mm
- Overall dimensions W×D×H 217×356×338 mm
- Net weight approx. 7 kg
- Permissible ambient temperature 10 °C/30 °C

Single-cell advanced technology:

- Fully automatic manufactured weighing cell from one piece of material
- Stable temperature behaviour
- Short stabilisation time: steady weight values within approx. 4 s (models with [d] = 0,1 mg), approx. 10 s (models with [d] = 0,01 mg) under laboratory conditions
- Shock proof construction
- High corner load performance

Accessories

- Protective working cover, scope of delivery 5 items, KERN ABT-A02S05
- 1 Set for density determination of liquids and solids with density $\leq/\geq 1$, the density is indicated directly on the display, KERN YDB-03
- 2 Ioniser to neutralise electrostatic charge, KERN YBI-01A
- 3 Weighing table to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03
- Minimum weight of sample, smallest weight to be weighed, depending on the required process accuracy, only in combination with a DAkkS calibration certificate, KERN 969-103
- Equipment qualification: compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ)
- Further details, plenty of further accessories and suitable printers see *Accessories*

STANDARD

CAL INT

RS 232

GLP

PC

RECIPE

PERCENT

UNIT

UNDER

MULTI

SC TECH

1 DAY

OPTION

DAkkS

+3 DAYS

FACTORY

M

+3 DAYS

Model	Weighing capacity [Max]	Readability [d]	Verification value [e]	Minimal load [Min]	Repro-ducibility	Linearity	Verification	Options
KERN	g	mg	mg	mg	mg	mg	MID KERN	DAkkS Calibr. Certificate
ABT 100-5NM	101	0,01	1	1	0,05	$\pm 0,15$	965-201	DAkkS KERN 963-101
ABT 120-4NM	120	0,1	1	10	0,1	$\pm 0,2$	965-201	963-101
ABT 220-4NM	220	0,1	1	10	0,1	$\pm 0,2$	965-201	963-101
ABT 320-4NM	320	0,1	1	10	0,1	$\pm 0,3$	965-201	963-101
Multi-range balance, with increasing load it switches automatically to the next largest weighing range [Max] and readout [d] and when the load is fully removed, the balance switches back to the lower range								
ABT 120-5DNM	42 120	0,01 0,1	1 1	1	0,02 0,1	$\pm 0,05$ 0,2	965-201	963-101
ABT 220-5DNM	82 220	0,01 0,1	1 1	1	0,05 0,1	$\pm 0,1$ 0,2	965-201	963-101

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

ALL-ROUND SECURITY IN DAILY LABORATORY LIFE

For quality assurance and easy, compliant sequences in the laboratory, KERN offers you an extensive range of services and plenty of suitable accessories – we will be happy to advise you.

The benefit of KERN accessories:

Count on it – everything fits together! Our product advisors can recommend the fitting accessories for your KERN devices, so that your individual weighing systems seamlessly work together in a stable and reliable way.

Our accessory tips for all KERN laboratory balances

For **thermal printer**, KERN YKH-01 or other suitable printers, see *Accessories*



Draft shield rear panel with integrated ioniser, to neutralise electrostatic charge, guarantees extremely rapid ionisation, KERN ABP-A01, see *Analytical Balances*



Solid weighing table

Professionalism and security for a stable weighing environment. Suitable for all laboratory balances, KERN YPS-03, see *Accessories*



→ Didn't find the right product in the catalogue?

You can find the full range of accessories and available KERN test equipment on the internet



All details on DAkkS calibration certificates for test weights, our KERN calibration service and other useful information can be found here: www.kern-lab.com

Looking for the right test equipment?

Sit back and relax! You will find that we have an enormous range of test weights and suitable calibration services – all in accordance with the current DAkkS guidelines.

For example, discover our DAkkS-calibrated KERN Safety Sets each with an appropriate test weight for correct adjusting of the balance, a small test weight for checking the minimum sample weight, plus space for another separate test weight.


Extensive details on all topics see *Test Weights*.





2 KERN ABP 100-5DM
with optional ioniser

Premium analytical balance with the latest Single-Cell Generation for extremely rapid, stable weighing results - now also as a version with automatic sliding doors

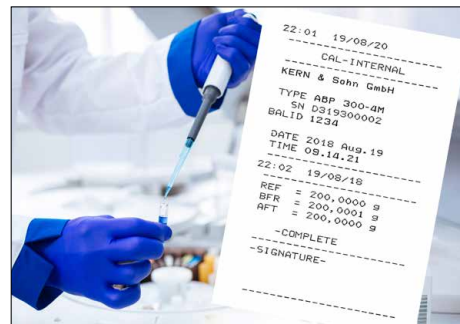

1 The internal draught shield minimises the effect of currents of air in the weighing chamber and therefore significantly improves the stabilisation time and repeatability

2 Draught shield rear panel with integrated ioniser, which can be fitted in place of the existing glass rear panel of the draught shield. Extremely fast ionization process, thanks to the latest generation of KERN ionization technology to neutralise electrostatic charge

GLP/ISO record keeping: professional, detailed GLP Protocol, so that the balance is completely compliant with the relevant standard requirements in accordance with ISO, GLP and GMP

Features

- This new generation of analytical balances combines the highest level of precision with large weighing ranges. Thanks to the new Single-Cell Generation, the weighing result is displayed in a fraction of the time with comparable models. Together with the intuitively structured menu, this means that you can work efficiently and rapidly
- Large glass draught shield with 3 sliding doors for easy access to the items being weighed
- KERN ABP-A: with 3 automatic sliding doors, which can be opened and closed using sensors, and integrated ioniser as standard. Thanks to the Memory Function, the balance stores how far the sliding doors have been opened. This prevents contamination and accelerates processes. Touching the sliding doors “gently” activates the push function and the doors open and shut automatically. The adjustable internal draught shield guarantees maximum stability of the weight readings
- Navigation pad for super quick navigating through the menus
- Automatic internal adjustment in the case of a change in temperature $\geq 1\text{ }^{\circ}\text{C}$ or timecontrolled every 4 h, guarantees high degree of accuracy and makes the balance independent of its location of use
- The minimum weight of sample can be manually stored in the device or automatically calculated. For weighings below this value, the balance issues a warning message
- Dosage aid: High stability mode and other filter settings can be selected
- Simple recipe weighing and documenting with a combined tare/print function. In addition, the ingredients for the recipe are numbered automatically and printed out with their corresponding number and nominal weight
- Individual user settings can be stored for up to 10 users: user name/number (can be printed out or added to the record for each process),

- password, menu language, user profiles, accessing user settings via barcode, additional guest mode for users who are not logged in, authorizations, eg. B. balance adjustment, changing settings or conditioning or modification of a recipe only by the authorized person & performing the formulation by the user
- RS 232 data interfaces and USB (device) for transferring weighing data and USB (host) to connect a USB keyboard for easy capture of item numbers, recipes, for easier navigation within the menu etc.
 - U.S. FDA 21 Part 11: assists you in data integrity in accordance with U.S. FDA 21 Part 11 (for example weighing result, sample ID, user name, scales ID, ...)
 - Menu languages DE, EN
 - Automatic data output to the PC/printer each time the balance is steady for models with [d] = 0,0001 g
 - Multi-function weighing plate included with delivery, minimises the effect of currents of air in the weighing chamber and therefore significantly improves the stabilisation time and repeatability. In addition samples, sample paper, PCR containers, micro centrifuge tubes and many other items which protrude can be easily fixed in place and weighed easily
 - ABP 200-5M: Erlenmeyer flask holder included with delivery
 - Protective working cover included with delivery

Technical data

- Luminescent OLED display, digit height 12 mm bright with high contrast, for easy reading of the weight, even in poor lighting conditions
- Dimensions weighing surface \varnothing 91 mm, stainless steel
- Weighing space WxDxH 166x156x220 mm
- Overall dimensions WxDxH 220x370x350 mm
- Net weight approx. 8 kg
- Permissible ambient temperature 10 $^{\circ}\text{C}$ /30 $^{\circ}\text{C}$


Accessories

- Protective working cover, scope of delivery 5 items, KERN YBA-A06S05
- Set for density determination of liquids and solids with density $\leq/\geq 1$, the density is indicated directly on the display, KERN YDB-03
- **1** Internal draught shield made of glass, KERN ABP-A02
- **2** Draught shield rear panel with integrated ionizer to neutralise electrostatic charge. Is fitted in place of the existing glass rear panel of the draught shield. Suitable for all models in the range, please order at the time you order your balance, the scope of delivery is the rear panel, ionizer, Universal plug-in power supply. Factory Option, KERN ABP-A01
- USB barcode scanner, hand-held version, dimensions WxDxH 152x84x63 mm, KERN PET-A09
- Minimum weight of sample, smallest weight to be weighed, depending on the required process accuracy, only in combination with a DAkKS calibration certificate, KERN 969-103
- Equipment qualification: compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ)
- Further details, plenty of further accessories and suitable printers see *Accessories*

Single-cell advanced technology:

- Fully automatic manufactured weighing cell from one piece of material
- Stable temperature behaviour
- Short stabilisation time: steady weight values within approx. 2 s (models with [d] = 0,1 mg), approx. 8 s (models with [d] = 0,01 mg) under laboratory conditions
- Shock proof construction
- High corner load performance

STANDARD



OPTION



FACTORY



Model	Weighing capacity [Max]	Readability [d]	Verification value [e]	Minimal load [Min]	Reproducibility	Linearity	Verification	Options
	g	mg	mg	mg	mg	mg	KERN	DAkKS Calibr. Certificate
ABP 100-5M	135	0,01	1	1	0,05	$\pm 0,1$	965-201	963-101
ABP 200-5M	220	0,01	1	1	0,05	$\pm 0,1$	965-201	963-101
ABP 100-4M	120	0,1	1	10	0,1	$\pm 0,2$	965-201	963-101
ABP 200-4M	220	0,1	1	10	0,1	$\pm 0,2$	965-201	963-101
ABP 300-4M	320	0,1	1	10	0,2	$\pm 0,3$	965-201	963-101

Multi-division balance, with increasing or decreasing load, it switches automatically to the next largest or smallest weighing range [Max] and readout [d].

ABP 100-5DM	52 120	0,01 0,1	1 1	1	0,02 0,1	$\pm 0,05$ 0,2	965-201	963-101
ABP 200-5DM	102 220	0,01 0,1	1 1	1	0,05 0,1	$\pm 0,1$ 0,2	965-201	963-101

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.



Automatic sliding doors, which can be opened and closed using sensors



Ioniser (included) can be activated at the touch of a button

4



Opening possible alternatively via button



Internal draft shield - minimises the effect of air currents in the weighing chamber, only for 0.01 mg models of the series ABP-A



KERN ABP-A with integrated ioniser and internal draft shield



Erlenmeyer piston holder, included as standard with ABP 200-5M and ABP 200-5AM



Multi-function weighing plate, Note: included with delivery for models with [d] = 0,01 mg

STANDARD														OPTION		FACTORY	
1x Host, 1x Device																	

Model	Weighing capacity [Max]	Readability	Verification value	Minimal load	Reproducibility	Linearity	Verification	Options
	g	[d] mg	[e] mg	[Min] mg	mg	mg		DAkKS Calibr. Certificate
KERN								DAkKS KERN
ABP 100-5AM	135	0,01	1	1	0,05	± 0,1	965-201	963-101
ABP 200-5AM	220	0,01	1	1	0,05	± 0,1	965-201	963-101
ABP 200-4AM	220	0,1	1	10	0,1	± 0,2	965-201	963-101
ABP 300-4AM	320	0,1	1	10	0,2	± 0,3	965-201	963-101
Multi-division balance, with increasing or decreasing load, it switches automatically to the next largest or smallest weighing range [Max] and readout [d].								
ABP 100-5DAM	52 120	0,01 0,1	1 1	1	0,02 0,1	± 0,05 0,2	965-201	963-101
ABP 200-5DAM	102 220	0,01 0,1	1 1	1	0,05 0,1	± 0,1 0,2	965-201	963-101

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.