



COUNTING SCALES, COUNTING SYSTEMS

Interesting Facts about Counting

Smallest part weight for piece counting

This is the smallest piece weight the scale will accept for piece counting and will display it piece by piece. In practice, depending on the required accuracy, we recommend to choose a counting scale with a minimum piece weight smaller than the weight of the item to be counted. To make it easier for you to select the right model, we specify the smallest part weight when counting under laboratory conditions and normal conditions, see the website.

► Counting resolution

Describes the maximum quantity which can be counted with a counting accuracy of 1 %, with a minimum variation of item weights and a sufficiently large ► **reference quantity** (20 pieces with counting resolution ≤ 60,000 points, 50 pieces from 60,000–150,000 points, 100 pieces ≥ 150,000 points). This therefore is an indication of the quality of the counting scale.

Recommended ► reference quantity

Weight tolerances of pieces to be counted are the most significant sources of error when counting. Therefore, at the start of every counting procedure, establish an average weight, the so-called ► **reference weight**, by placing several pieces on the balance, the so-called reference quantity. Usually this would be:

5 pieces	>>	often sufficient
10 pieces	>>	common practise
20–100 pieces	>>	for large deviations among piece weights

The “automatic ► **reference optimisation**” function increases the reference quantity gradually, whereby the average piece weight is optimised step by step. This contributes considerably to the accuracy of the subsequent counting processes.

Which Counting Scale for Which Application?

Simple counting scale

With self-explanatory user guidance on the keyboard. The graphic control panel enables you to start working immediately, without having to consult the user manual. Easy handling, value for money.

Professional counting scale

With 3 separate displays for reference weight (average weight of the pieces), total weight of all pieces and total quantity of all pieces. Very useful integrated memories, e.g. for container weight, item number, reference weight as well as audible and visual counting aids and an alphanumeric key pad for easy data entry.

Special tip for counting large quantities: Counting systems

The weighing capacities of bench counting scales are often not sufficient to count large quantities, units, palletized items, etc. In this case, high-performing counting systems come into operation, as these combine a high-precision reference scale with a high-capacity bulk scale.








► See the Glossary

Quick-Finder Counting Scales/Counting Systems

Readout	Weighing range [Max]	Smallest part weight (Normal)	Counting resolution	Model	Page	M						
[d] g	kg	g/piece	Points	KERN		For an explanation on the pictos, see the front flap						
0,001	6	0,05	1.200.000	CCS 6K-6	84	●	●	●	●	○		
0,001	15	0,05	3.000.000	CCS 10K-6	84	●	●	●	●	○		
0,001	0,3	0,01	300.000	CFS 300-3	77	●	●	●	●	○		
0,001	0,36	0,02	180.000	CKE 360-3	78	●	●	○	●	○		
0,01	3	0,1	300.000	CFS 3K-5	77	●	●	●	●	○		
0,01	3,6	0,2	180.000	CKE 3600-2	78	●	●	○	●	○		
0,01	3 6	0,2	300.000	CCA 6K-5M	82	○	●	●	●	●		
0,01	6 15	0,2	750.000	CCA 10K-5M	82	○	●	●	●	●		
0,01	15 30	0,2	1.500.000	CCA 30K-5M	82	○	●	●	●	●		
0,01	30	0,5	600.000	CCS 30K0.01.	84	●	●	●	●	○		
0,01	30 60	0,2	3.000.000	CCA 60K-5M	82	○	●	●	●	●		
0,01	60	0,5	1.200.000	CCS 60K0.01.	84	●	●	●	●	○		
0,01	60	0,5	1.200.000	CCS 60K0.01L.	84	●	●	●	●	○		
0,01	60 150	0,2	7.500.000	CCA 100K-5M	82	○	●	●	●	●		
0,01	150	0,5	3.000.000	CCS 150K0.01	84	●	●	●	●	○		
0,01	150	0,5	3.000.000	CCS 150K0.01L	84	●	●	●	●	○		
0,02	4	0,2	200.000	CDS 4K0.02	80	●	●	○	●	○		
0,02	6	0,2	300.000	CKE 6K0.02	78	●	●	○	●	○		
0,05	8	0,5	160.000	CKE 8K0.05	78	●	●	○	●	○		
0,05	15	0,5	300.000	CDS 15K0.05	80	●	●	○	●	○		
0,05	16	0,5	320.000	CKE 16K0.05	78	●	●	○	●	○		
0,1	3 6	1	60.000	CCA 6K-4M	82	○	●	●	●	●		
0,1 0,2	3 6	1	60.000	IFS 6K-4S	79	●	●	●	●	○		
0,1	6 15	1	150.000	CCA 10K-4M	82	○	●	●	●	●		
0,1 0,2	6 15	2	75.000	IFS 10K-4	79	●	●	●	●	○		
0,1	6	1	60.000	CPB 6K0.1N	76	●	●	●	●	○		
0,1	6	1	60.000	CFS 6K0.1	77	●	●	●	●	○		
0,1	15 30	1	300.000	CCA 30K-4M	82	○	●	●	●	●		
0,1	16	1	160.000	CKE 16K0.1	78	●	●	○	●	○		
0,1	16	1	160.000	CDS 16K0.1	80	●	●	○	●	○		
0,1	30	1	300.000	CCS 30K0.1.	84	●	●	●	●	○		
0,1	30 60	1	600.000	CCA 60K-4M	82	○	●	●	●	●		
0,1	30	1	300.000	CDS 30K0.1	80	●	●	○	●	○		
0,1	30	1	300.000	CDS 30K0.1L	80	●	●	○	●	○		
0,1	36	1	360.000	CKE 36K0.1	78	●	●	○	●	○		
0,1	60	1	600.000	CCS 60K0.1.	84	●	●	●	●	○		
0,1	60	1	600.000	CCS 60K0.1L.	84	●	●	●	●	○		
0,1	60 150	1	1.500.000	CCA 100K-4M	82	○	●	●	●	●		
0,1	150	1	1.500.000	CCS 150K0.1.	84	●	●	●	●	○		
0,1	150	1	1.500.000	CCS 150K0.1L	84	●	●	●	●	○		
0,2	3	1	30.000	CIB 3K-4	74	●	●	●	●	○		
0,2	3	2	15.000	CXB 3K0.2	75	●	●	●	●	○		
0,2 0,5	12 30	5	60.000	IFS 30K0.2DL	79	●	●	●	●	○		
0,2	15	2	75.000	CFS 15K0.2	77	●	●	●	●	○		
0,2	15	2,5	60.000	CPB 15K0.2N	76	●	●	●	●	○		
0,2	36	2	180.000	CDS 36K0.2L	80	●	●	○	●	○		
0,2	60	2	300.000	CDS 60K0.2	80	●	●	○	●	○		
0,2	65	2	325.000	CKE 65K0.2	78	●	●	○	●	○		
0,5	6	2	30.000	CIB 6K-4	74	●	●	●	●	○		
0,5	6	5	12.000	CXB 6K0.5	75	●	●	●	●	○		
0,5	30	5	60.000	CPB 30K0.5N	76	●	●	●	●	○		
0,5	30	5	60.000	CFS 30K0.5	77	●	●	●	●	○		
0,5 1	30 60	10	60.000	IFS 60K0.5D	79	●	●	●	●	○		
0,5 1	30 60	10	60.000	IFS 60K0.5DL	79	●	●	●	●	○		
1	3	10	3.000	CXB 3K1NM	75	○	●	●	●	○		
1 2	3 6	1	60.000	CPB 6K1DM	76	○	●	●	●	○		
1 2	3 6	1	60.000	IFS 6K-3SM	79	○	●	●	●	○		
1 2	3 6	1	60.000	IFS 6K-3M	79	○	●	●	●	○		
1	15	5	30.000	CIB 10K-3	74	●	●	●	●	○		
1	15	10	15.000	CXB 15K1	75	●	●	●	●	○		
1	50	10	50.000	CFS 50K-3	77	●	●	●	●	○		
1 2	75 150	25	60.000	IFS 100K-3	79	●	●	●	●	○		
1 2	75 150	25	60.000	IFS 100K-3L	79	●	●	●	●	○		
2	6	20	3.000	CXB 6K2NM	75	○	●	●	●	○		
2 5	6 15	2	75.000	IFS 10K-3M	79	○	●	●	●	○		
2 5	6 15	2	75.000	IFS 10K-3LM	79	○	●	●	●	○		
2 5	6 15	2,5	60.000	CPB 15K2DM	76	○	●	●	●	○		
2	30	10	30.000	CIB 30K-3	74	●	●	●	●	○		
2	30	20	15.000	CXB 30K2	75	●	●	●	●	○		
2 5	150 300	50	60.000	IFS 300K-3	79	●	●	●	●	○		
5	15	50	3.000	CXB 15K5NM	75	○	●	●	●	○		


● Standard ○ Option

Quick-Finder Counting Scales/Counting Systems

Readout	Weighing range [Max]	Smallest part weight (Normal)	Counting resolution	Model	Page							
[d]	kg	g/piece	Points	KERN		For an explanation on the pictos, see the front flap						
5 10	15 30	5	60.000	CPB 30K5DM	76	○	●	●	●	○		
5 10	15 30	5	60.000	IFS 30K-3M	79	○	●	●	●	○		
10	30	100	3.000	CXB 30K10NM	75	○	●	●	○			●
10 20	30 60	10	60.000	IFS 60K-2M	79	○	●	●	●	○		
10 20	30 60	10	60.000	IFS 60K-2LM	79	○	●	●	●	○		
20 50	60 150	25	60.000	IFS 100K-2M	79	○	●	●	●	○		
20 50	60 150	25	60.000	IFS 100K-2LM	79	○	●	●	●	○		

● Standard ○ Option



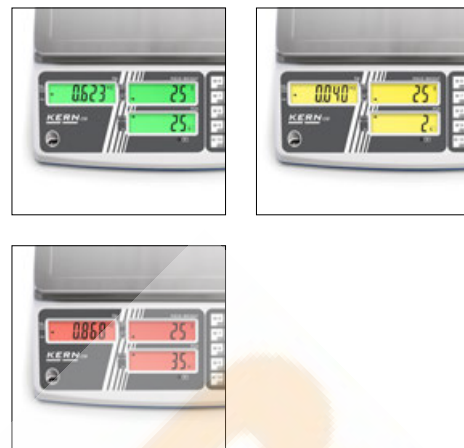

Discover more details and matching accessories online!

Robust counting scale with large article memory, convenient operating philosophy and checkweighing display, counting resolution up to 30,000 points

9

Features

- Innovative counting with tolerance range (Checkweighing): The counting process can be supported visually and/or audibly and this therefore makes portion division, dispensing and grading easier
 - visual signal: the colour of the display changes depending on the counting result (not enough/ok/too much)
 - audible signal: the frequency of the audible signal changes depending on the counting result (not enough/ok/too much)
- Ideal for workshops for people with disabilities, particularly loud or quiet environments, where operators change frequently, etc.
- Three displays for weight display, reference weight, total pieces
- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value
- Programmable using numerical key pad:
 - required reference quantity
 - known reference weight

- Counting results memory: adds up all individual piece counts, result is shown in total weight and total pieces
- PRE-TARE function for manual subtraction of a known container weight, useful for checking fill-levels
- 20 direct price keys for frequently recurring reference weights and PRE-Tare values
- Memory for 50 reference weights and PRE-Tare values
- Thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations
- Changes from counting mode to weighing mode at the touch of a key
- Energy management: Backlight turns off after 5 sec, can be switched off
- Protective working cover included with delivery

Technical data

- Large backlit LCD displays, digit height 18 mm
- Dimensions weighing surface, stainless steel, WxD 315x215 mm
- Overall dimensions WxDxH 350x330x120 mm
- Rechargeable battery pack integrated, as standard, operating time up to 160 h without backlight, charging time approx. 14 h
- Net weight approx. 4,0 kg
- Permissible ambient temperature -10 °C/40 °C

STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Smallest part weight (Normal) g/piece	Counting resolution Points	Options
					Calibr. Certificate DAkkS accr. KERN
KERN					
CIB 3K-4	3	0,2	1	30.000	963-127
CIB 6K-4	6	0,5	2	30.000	963-128
CIB 10K-3	15	1	5	30.000	963-128
CIB 30K-3	30	2	10	30.000	963-128



Discover more details and matching accessories online!

Entry level model into professional counting, counting resolution of 30,000 points, verification optional

Features

- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value
- Programmable using numerical key pad:
 - required reference quantity
 - known reference weight
- Three displays for weight display (verifiable), reference weight, total pieces
- Fill-to-target function: Target count or target weight can be programmed. When the target weight is reached there is an audible and visual signal
- 10 memories for reference weights
- Counting results memory: adds up all individual piece counts, result is shown in total weight and total pieces

- Integrated ESD protection, which makes it ideal for weighing small plastic parts
- Energy management: Backlight turns off after 5 sec
- PRE-TARE function for manual subtraction of a known container weight, useful for checking fill-levels
- Changes from counting mode to weighing mode at the touch of a key
- Protective working cover included with delivery

Technical data

- Large backlit LCD displays, digit height 18 mm
- Dimensions weighing surface, stainless steel, W×D 300×225 mm
- Overall dimensions W×D×H 300×330×110 mm
- Rechargeable battery pack integrated, as standard, operating time up to 200 h without backlight, charging time approx. 8 h
- Net weight approx. 4,0 kg
- Permissible ambient temperature -10 °C/40 °C

Note: Official verification is mandatory for commercial trade

STANDARD OPTION FACTORY

CXB-NM

Model	Weighing capacity [Max]	Readability [d]	Verification value [e]	Minimal load [Min]	Smallest part weight (Normal)	Counting resolution	Options	
							Verification	Calibr. Certificate
KERN	kg	g	g	g	g/piece	Points	M KERN	DAkkS accr. KERN
CXB 3K0.2	3	0,2	-	-	2	15.000	-	963-127
CXB 6K0.5	6	0,5	-	-	5	12.000	-	963-128
CXB 15K1	15	1	-	-	10	15.000	-	963-128
CXB 30K2	30	2	-	-	20	15.000	-	963-128

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

CXB 3K1NM	3	1	1	20	10	3.000	965-227	963-127
CXB 6K2NM	6	2	2	40	20	3.000	965-228	963-128
CXB 15K5NM	15	5	5	100	50	3.000	965-228	963-128
CXB 30K10NM	30	10	10	200	100	3.000	965-228	963-128



Discover more details and matching accessories online!

Professional model, counting resolution 60,000 points, verification optional

9

Features

- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value
- Programmable using numerical key pad:
 - required reference quantity
 - known reference weight
- Three displays for weight display (verifiable), reference weight, total pieces
- Counting results memory: adds up all individual piece counts, result is shown in total weight and total pieces
- Fill-to-target function: Target count or target weight can be programmed. When the target value is reached, this will be indicated by an audible signal

- PRE-TARE function for manual subtraction of a known container weight, useful for checking fill-levels
- Thanks to rechargeable battery operation (optional), compact, lightweight construction, it is suitable for the use in several locations
- Changes from counting mode to weighing mode at the touch of a key
- Protective working cover included with delivery

Technical data


- Large backlit LCD displays, digit height 20 mm
- Dimensions weighing surface, stainless steel, WxD 295x225 mm
- Overall dimensions WxDxH 315x350x100 mm
- Net weight approx. 3,2 kg
- Permissible ambient temperature 0 °C/40 °C

Note: Official verification is mandatory for commercial trade

STANDARD								OPTION		FACTORY		
									1 DAY			CPB-DM

Model	Weighing capacity [Max] kg	Readability [d] g	Verification value [e] g	Minimal load [Min] g	Smallest part weight (Normal) g/piece	Counting resolution Points	Options	
							Verification	Calibr. Certificate
KERN								DAkkS accr. KERN
CPB 6K0.1N	6	0,1	-	-	1	60.000	-	963-128
CPB 15K0.2N	15	0,2	-	-	2,5	60.000	-	963-128
CPB 30K0.5N	30	0,5	-	-	5	60.000	-	963-128
Multi-division balance, with increasing or decreasing load, it switches automatically to the next largest or smallest weighing range [Max] and readout [d].								
CPB 6K1DM	3 6	1 2	1 2	20	1	60.000	965-228	963-128
CPB 15K2DM	6 15	2 5	2 5	40	2,5	60.000	965-228	963-128
CPB 30K5DM	15 30	5 10	5 10	100	5	60.000	965-228	963-128

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order. The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.



Discover more details and matching accessories online!

Professional, high-resolution counting scale with 100 item memories and second balance interface, counting resolution up to 75,000 points

Features

- Memory (PLU) for 100 items with additional text, reference weight and tare weight, e.g. of a container
- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value
- Programmable using numerical key pad:
 - required reference quantity
 - known reference weight
- Three displays for weight display, reference weight, total pieces
- Weighing with tolerance range: a visual and audible signal helps with portioning, dispensing or grading

- Fill-to-target function: Programmable target quantity or target weight e.g. for check-weighing. A signal will be displayed when the target value is reached
- PRE-TARE function for manual subtraction of a known container weight, useful for checking fill-levels
- Second balance interface to construct a high-resolution counting system, standard, e.g. with weighing bridges of KERN KFP V20
- Draught shield standard for models with weighing plate size **A**, weighing space W×D×H 155×141×80 mm
- Protective working cover included with delivery, for models with weighing plate size **A**, **B**

Technical data

- Large backlit LCD displays, digit height 20 mm
- Dimensions weighing surface
 - A** ø 80 mm
 - B** W×D 295×225 mm, see larger picture
 - C** W×D 370×240 mm
- Overall dimensions W×D×H
 - A** 315×350×110 mm / 315×350×185 mm (incl. draught shield)
 - B** 315×350×100 mm
 - C** 370×360×100 mm
- Permissible ambient temperature 0 °C/40 °C

STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Smallest part weight (Normal) g/piece	Counting resolution Points	Net weight approx. kg	Weighing plate	Options
							Calibr. Certificate DAkkS accr. KERN
KERN CFS 300-3	0,3	0,001	0,01	300.000	2,6	A	963-127
CFS 3K-5	3	0,01	0,1	300.000	3,4	B	963-127
CFS 6K0.1	6	0,1	1	60.000	3,2	B	963-128
CFS 15K0.2	15	0,2	2	75.000	3,4	B	963-128
CFS 30K0.5	30	0,5	5	60.000	3,4	B	963-128
CFS 50K-3	50	1	10	50.000	4,4	C	963-128



Discover more details and matching accessories online!

Easy to use, self-explanatory counting scale with laboratory accuracy, ideal for the various possibilities of Industry 4.0 applications, counting resolution up to 360.000 points

Features

- Self-explanatory, graphic control panel
 - no learning time = reduces costs
 - ideal for untrained users
 - visualised process avoids operating errors
- The 4 steps are carried out from left to right:
 - 1** Place the empty container onto the weighing plate and tare by pressing the TARE key
 - 2** Place the reference quantity for the goods to be counted into the container (5, 10, 20 or any number of pieces)
 - 3** Confirm the selected reference quantity by pressing the key (5, 10, 20 or any number of pieces)
 - 4** Pour in the goods to be counted. The number of pieces will immediately be shown in the display

- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value
- KERN Universal Port (KUP): permits the connection of an external KUP interface adapter, such as, for example, RS-232, USB, Bluetooth, WiFi or Ethernet, for the exchange of data and control commands, without any installation outlay
- KERN Communication Protocol (KCP): The KCP permits searching and remote control of the balance using external control devices or computers
- Changes from counting mode to weighing mode at the touch of a key
- Ring-shaped draught shield standard, only for models with weighing plate size **A**, weighing space $\phi \times H$ 90×40 mm
- Protective working cover included with delivery

Technical data

- Large backlit LCD display, digit height 25 mm
- Optional battery operation, 4×1.5 V AA not included in scope of delivery, operating time up to 20 h
- Dimensions weighing surface
 - A** ϕ 82 mm, plastic
 - B** W×D 130×130 mm, plastic, see larger picture
 - C** W×D 340×240 mm, stainless steel
- Overall dimensions W×D×H
 - A** 163×245×65 mm / 163×245×123 mm (incl. draught shield)
 - B** 163×245×65 mm
 - C** 350×390×120 mm
- Permissible ambient temperature -10 °C/40 °C

STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Smallest part weight (Normal) g/piece	Counting resolution Points	Net weight approx. kg	Weighing plate	Options
							Calibr. Certificate DAkkS accr. KERN
KERN							
CKE 360-3	0,36	0,001	0,02	180.000	0,85	A	963-127
CKE 3600-2	3,6	0,01	0,2	180.000	1,6	B	963-127
CKE 6K0.02	6	0,02	0,2	300.000	7	C	963-128
CKE 8K0.05	8	0,05	0,5	160.000	7	C	963-128
CKE 16K0.05	16	0,05	0,5	320.000	7	C	963-128
CKE 16K0.1	16	0,1	1	160.000	7	C	963-128
CKE 36K0.1	36	0,1	1	360.000	7	C	963-128
CKE 65K0.2	65	0,2	2	325.000	7	C	963-129



Discover more details and matching accessories online!

Industrial counting scale with convenient decimal keypad and high counting resolution, verification optional

Features

- Display device with large keypad and high-contrast LCD display for easy entry and reading of, e.g., tare weights, reference weights, limit values etc.
- Three displays for weight display (verifiable), reference weight, total pieces
- 100 item memories for master data such as reference weight, reference quantity, container weight (PRE-TARE) etc.

- The manual reference weight optimisation gradually improves the average value of the piece weight
- Totalising of pieces when counting
- Printout with date and time
- Protective working cover over the display device included with the delivery

Technical data

- Large backlit LCD displays, digit height 16,5 mm
- Weighing platform dimensions W×D×H, stainless steel
 - A** 230×230×110 mm
 - B** 300×240×110 mm
 - C** 400×300×120 mm
 - D** 500×400×120 mm
 - E** 650×500×140 mm
- Dimensions of display device W×D×H 260×150×65 mm
- Cable length of display device approx. 3 m
- Permissible ambient temperature -10 °C/40 °C

STANDARD



OPTION



FACTORY



Model	Weighing capacity [Max]	Readability [d]	Verification value [e]	Minimal load [Min]	Smallest part weight (Normal)	Net weight approx. kg	Weighing plate	Options	
								Verification	Calibr. Certificate
KERN	kg	g	g	g	g/piece	kg		KERN	DAkkS accr. KERN
Multi-range balance, with increasing load it switches automatically to the next largest weighing range [Max] and readout [d] and when the load is fully removed, the balance switches back to the lower range									
IFS 6K-4S*	3 6	0,1 0,2	-	-	1	3,8	A	-	963-128
IFS 10K-4	6 15	0,1 0,2	-	-	2	6	B	-	963-128
IFS 30K0.2DL	12 30	0,2 0,5	-	-	5	7	C	-	963-128
IFS 60K0.5D	30 60	0,5 1	-	-	10	7	C	-	963-129
IFS 60K0.5DL	30 60	0,5 1	-	-	10	12	D	-	963-129
IFS 100K-3	75 150	1 2	-	-	25	12	D	-	963-129
IFS 100K-3L	75 150	1 2	-	-	25	20	E	-	963-129
IFS 300K-3	150 300	2 5	-	-	50	22	E	-	963-129

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order.

The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

IFS 6K-3SM*	3 6	1 2	1 2	20 40	1	3,8	A	965-228	963-128
IFS 6K-3M	3 6	1 2	1 2	20 40	1	5,0	B	965-228	963-128
IFS 10K-3M	6 15	2 5	2 5	40 100	2	4,8	B	965-228	963-128
IFS 10K-3LM	6 15	2 5	2 5	40 100	2	7	C	965-228	963-128
IFS 30K-3M	15 30	5 10	5 10	100 200	5	7	C	965-228	963-128
IFS 60K-2M	30 60	10 20	10 20	200 400	10	7	C	965-229	963-129
IFS 60K-2LM	30 60	10 20	10 20	200 400	10	13	D	965-229	963-129
IFS 100K-2M	60 150	20 50	20 50	400 1000	25	12	D	965-229	963-129
IFS 100K-2LM	60 150	20 50	20 50	400 1000	25	22	E	965-229	963-129

* ONLY WHILE STOCKS LAST



Discover more details and matching accessories online!

Easy to use industrial counting scale for heavy loads, counting resolution up to 300,000 points, ideal for the diverse possibilities of Industry 4.0 applications

9

Features

- Self-explanatory, graphic control panel
 - no learning time = reduces costs
 - ideal for untrained users
 - visualised process avoids operating errors
- The 4 steps are carried out from left to right:
 - 1** Place the empty container onto the weighing plate and tare by pressing the TARE key
 - 2** Place the reference quantity for the goods to be counted into the container (5, 10 or 20 pieces)
 - 3** Confirm the selected reference quantity by pressing the key (5, 10 or 20)
 - 4** Pour in the goods to be counted. The number of pieces will immediately be shown in the display
- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value

- KERN Universal Port (KUP): permits the connection of an external KUP interface adapter, such as, for example, RS-232, USB, Bluetooth, WiFi or Ethernet, for the exchange of data and control commands, without any installation outlay
- KERN Communication Protocol (KCP): The KCP permits searching and remote control of the balance using external control devices or computers
- Standardised, simplified concept of operation
- Protective working cover over the display device included with the delivery

Technical data

- Backlit LCD display, digit height 21 mm
- Weighing platform dimensions, stainless steel
 - A** W×D×H 230×230×103 mm
 - B** W×D×H 308×318×75 mm, see larger picture
 - C** W×D×H 500×400×127 mm
- Dimensions of display device W×D×H 225×115×60 mm
- Cable length of display device approx. 2,5 m
- Permissible ambient temperature -10 °C/40 °C

STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Smallest part weight (Normal) g/piece	Counting resolution Points	Net weight approx. kg	Weighing plate	Options
							Calibr. Certificate DAkkS accr. KERN
KERN CDS 4K0.02	4	0,02	0,2	200.000	8	A	963-127
CDS 15K0.05	15	0,05	0,5	300.000	8	B	963-128
CDS 16K0.1	16	0,1	1	160.000	8	B	963-128
CDS 30K0.1	30	0,1	1	300.000	8	B	963-128
CDS 30K0.1L	30	0,1	1	300.000	19	C	963-128
CDS 36K0.2L	36	0,2	2	180.000	19	C	963-128
CDS 60K0.2	60	0,2	2	300.000	19	C	963-129



VERSATILE PRODUCTS

You will always find the right model for your application in our wide range of platform scales.

The unbeatable benefits of platform scales:

- Weighing range from 3 kg - 600 kg
- Robust platform construction for the harshest industrial use
- Versatile, available with column
- High degree of overload protection
- Stainless steel weighing plate, shock proof and easy to clean
- Large selection of platform sizes
- Display device can be positioned separately, e.g. wall-mounted, on a column or next to the platform. Clear view for the user of the display even with bulky items on the scale.

→ Top Tip:

If you can't find what you are looking for in our standard range, then we can offer you our CUSOS service: Perfect weighing solutions with personalised platform sizes, specific software solutions and adapted peripheral devices.

For further information on this, see page 130/131.

KERN platform scales – as versatile as your areas of use

- Entry-level models – portable, economical and well-made – e.g. for weighing post and packages
- High-quality models – with high IP rating and with EC type approval for commercial trade
- Top models – as a user-friendly solution for a wide range of recipe weighing or check-weighing applications with relay control and much more

Tip: With KERN EasyTouch you can expand the range of possible applications for efficient balances even further.

True allrounders – suitable for entry-level users and industrial professionals

In order to fulfil the diverse requirements of our industrial customers, KERN platform scales have a large number of practical features, such as, for example, counting and totalling functions, data interfaces (RS 232, RS 485, USB, Bluetooth, WLAN, Ethernet, analogue module), options for integration into networks, PC or printer connections, rechargeable battery/battery operation for mobile use and much more. KERN platform scales – just true allrounders!

Tip: The “Hold function” is particularly useful for industrial weighing and guarantees stable weights even when the ambient conditions is unstable.

The very best in user-friendliness

With KERN EasyTouch on the display device (PC, laptop, tablet, smartphone), the display can be connected wirelessly via Bluetooth or WiFi. This means it is possible to weigh directly at the location of use and read the results from a distance of up to 20 metres.



You can find a large selection of platform scales and practical accessories, such as, for example, columns etc. in *Accessories* or on the internet.



High-resolution counting system to count the smallest parts in large quantities, maximum number of parts which can be displayed is 999,999, verification optional

Features

- The highly accurate KERN CCA counting system can replace a whole range of individual balances, efficiently and at a reasonable price
- Thanks to optional verification, it is also suitable for use in verified applications
- The balances are connected to one another with an RS-232 Y-cable, which also allows you to connect a printer

Reference scale KERN EWJ

- This precision balance, which can be used as an individual balance, also fulfils the highest demands through connection with a high-capacity platform
- Automatic internal adjustment, time-controlled every 2 h, guarantees high degree of accuracy and makes the balance independent of its location
- Draught shield standard for models with [Max] = 600 g, weighing space W×D×H = 134×128×80 mm
- Protective working cover included with delivery

Quantity scale KERN IFS

- The high-accuracy quantity counting takes place on the weighing platform IFS. In this way even the smallest of parts can be counted in large volumes
- Tough industry standard suitable for use in harsh industrial applications
- Display device with large keypad and high-contrast LCD display for easy entry and reading of, e.g., tare weights, reference weights, limit values etc.
- Three displays for weight display, reference weight, total pieces
- 100 item memories for master data such as reference weight, reference quantity, container weight (PRE-TARE) etc.
- The manual reference weight optimisation gradually improves the average value of the piece weight
- Totalising of pieces when counting
- Printout with date and time
- Aluminium singlepoint load cell (1×3000 e), protection against dust and water splashes IP65
- Protective working cover over the display device included with the delivery



9

Counting system to count the smallest parts in large quantities, maximum number of parts which can be displayed is 999,999

Features

- The highly accurate KERN CCS counting system can replace a whole range of individual balances, efficiently and at a reasonable price

Reference scale KERN CFS

- This professional counting scale, which can also be used as a stand-alone scale, meets the highest demands for accuracy, weighing capacity and volume of items, by being connected to a high-capacity weighing bridge
- Programmable using numerical key pad:
 - required reference quantity
 - known reference weight
- Three displays for weight display, reference weight, total pieces
- Memory (PLU) for 100 items with additional text, reference weight and tare weight, e.g. of a container
- Fill-to-target function: Target count or target weight can be programmed. When the target weight is reached there is an audible and visual signal

- The automatic reference weight optimisation of reference weight gradually improves the average piece weight value
- Draught shield standard for models with [d] = 0,001 g, weighing space W×D×H 155×141×80 mm
- Protective working cover included with delivery

Quantity scale

KERN KFP / KERN KFU / KERN KIP

- The high-accuracy quantity counting takes place on the weighing platform (= weighing bridge). In this way even the smallest of parts can be counted in large volumes

Platform KERN KFP-V20 IP65

- Weighing plate stainless steel, painted steel base
- Aluminium singlepoint load cell, protection against dust and water splashes IP65
- Models with weighing plate size **A - E**

Weighing bridge KERN KIP-V20M IP67



- Lacquered steel weighing bridge, corrugated steel plate. Extremely resistant to bending due to material thickness
- 4 load cells, alloy steel, silicone-coated, IP67
- Models with weighing plate size **F, G, H**

Weighing bridge KERN KFP-V20 IP67

- Weighing bridge painted steel, Weighing plate screwed on from the top
- 4 load cells, alloy steel, silicone-coated, IP67
- Models with weighing plate size **I**

U-shaped weighing bridge KERN KFU-V20

- Load range: painted steel
- 4 load cells, alloy steel, silicone-coated, IP67
- Models with weighing plate size **J**

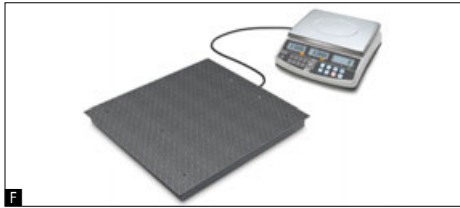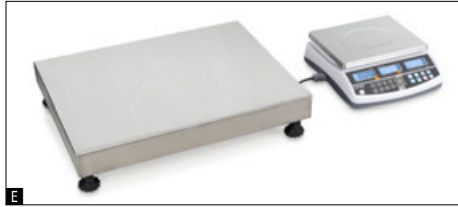

Discover more details and matching accessories online!

Technical data

Reference scale KERN CFS

- Dimensions weighing surface, stainless steel
 - 1** [d] = 0,001 g: \varnothing 80 mm
 - [d] \geq 0,01 g: WxD 295x225 mm
- Overall dimensions WxDxH 315x350x100 mm
- Net weight
 - 1** [d] = 0,001 g: approx. 2,6 kg
 - [d] \geq 0,01 g: approx. 3,4 kg

Quantity platforms, KERN KFP-V20 IP65

- Weighing platform dimensions, stainless steel
 - A** WxDxH 230x230x103 mm
 - B** WxDxH 300x240x105 mm
 - C** WxDxH 400x300x114 mm
 - D** WxDxH 500x400x124 mm
 - E** WxDxH 650x500x136 mm

Quantity platforms, KERN KIP-V20M

- Weighing platform dimensions, metal, lacquered
 - F** WxDxH 1000x1000x108 mm
 - G** WxDxH 1200x1500x108 mm
 - H** WxDxH 1500x1500x108 mm

Bulk weighing bridges, KERN KFP-V20 IP67

- Weighing platform dimensions, metal, lacquered
 - I** WxDxH 1500x1250x80 mm

Bulk pallet load handling, KERN KFU-V20

- Weighing platform dimensions, metal, lacquered
 - J** WxDxH 840x1190x90 mm
- Connection cable approx.
 - A-E** 3 m
 - F-J** 5 m

STANDARD



OPTION



Model	Quantity scale		Weighing plate (Quantity scale)	Reference scale		Counting resolution Points	Smallest part weight (Normal) g/piece	Options
	Weighing capacity [Max] kg	Readability [d] g		Weighing capacity [Max] g	Readability [d] g			Calibr. Certificate DAKkS accr. KERN
KERN								
CCS 6K-6	6	0,2	A	300	0,001	1.200.000	0,05	962-128-127
CCS 10K-6	15	0,5	B	300	0,001	3.000.000	0,05	962-128-127
CCS 30K0.01.	30	1	C	3000	0,01	600.000	0,5	962-128-127
CCS 30K0.1.	30	1	C	6000	0,1	300.000	1	962-128-128
CCS 60K0.01.	60	2	C	3000	0,01	1.200.000	0,5	962-129-127
CCS 60K0.01L.	60	2	D	3000	0,01	1.200.000	0,5	962-129-127
CCS 60K0.1.	60	2	C	6000	0,1	600.000	1	962-129-128
CCS 60K0.1L.	60	2	D	6000	0,1	600.000	1	962-129-128
CCS 150K0.01	150	5	D	3000	0,01	3.000.000	0,5	962-129-127
CCS 150K0.01L	150	5	E	3000	0,01	3.000.000	0,5	962-129-127
CCS 150K0.1.	150	5	D	6000	0,1	1.500.000	1	962-129-128
CCS 150K0.1L	150	5	E	6000	0,1	1.500.000	1	962-129-128