

2



SCHOOL BALANCES

As entry-level models, KERN school balances cover the most important basic applications of laboratory balances and offer simple operation, easy readability and an optimal price-performance ratio. The KERN School balances can be used flexibly and independent of location thanks to battery operation and are therefore the ideal choice for school or teaching purposes.

Our recommendation: the KERN EFS school balance in our product range, a space-saving and inexpensive allrounder for school teaching programs and universities.

Quick-Finder School Balances

Readout	Weighing range	Model	Page					
[d]	[Max]	KERN		For an explanation on the pictos, see the front flap				
g	g							
0,001	100	EMB 100-3	12	●			○	●
0,001	200	EMB 200-3	12	●			○	●
0,001	200	EMB 200-3V	13	●	●		○	●
0,001	300	EMS 300-3	14	●		●	●	●
0,01	200	EMB 200-2	12	●			○	●
0,01	500	EHA 500-2	15	●		●	●	●
0,01	500	EFS 500-2	11	●			○	●
0,01	600	EMB 600-2	12	●			○	●
0,01	1000	EMB 1000-2	12	●			○	●
0,01	2000	EMB 2000-2	12	●			○	●
0,01	2000	EMB 2000-2V	13	●	●		●	●
0,01	3000	EMS 3000-2	14	●		●	●	●
0,1	220	EFS 200-1S05	11	●			○	●
0,1	500	EMB 500-1	12	●			○	●
0,1	500	EMB 500-1BE	12	●			○	●
0,1	500	EHA 500-1	15	●		●	●	●
0,1	620	EFS 600-1S05	11	●			○	●
0,1	1000	EHA 1000-1	15	●		●	●	●
0,1	1200	EMB 1200-1	12	●			○	●
0,1	3000	EHA 3000-1	15	●		●	●	●
0,1	3000	EFS 3000-1	11	●			○	●
0,1	3000	EMB 3000-1	12	●			○	●
0,1	6000	EMB 6000-1	12	●			○	●
0,1	6000	EMS 6K0.1	14	●		●	●	●
0,1	12000	EMS 12K0.1	14	●		●	●	●
1	2200	EMB 2200-0	12	●			○	●
1	2200	EFS 2000-0S05	11	●			○	●
1	3000	EHA 3000-0	15	●		●	●	●
1	5200	EMB 5.2K1	12	●			○	●
1	5200	EFS 5000-0S05	11	●			○	●
1	6000	EMS 6K1	14	●		●	●	●
1	12000	EMS 12K1	14	●		●	●	●
5	5200	EMB 5.2K5	12	●			○	●

● Standard ○ Option

SET
5x



2



Discover more details and matching accessories online!

Perfect school balances for experimental teaching – easy to use, space-saving, stackable

Features

- Simple and convenient 2-key operation, making them ideal for use in schools and universities
- Tare function facilitates formulation work
- Particularly flat design
- Secure and non-slip positioning with rubber feet
- **1** Stackable for space-saving storage
- **2** Practical battery operation using standard batteries ensures a high level of flexibility and freedom from mains adapters, sockets, chargers, etc.

Technical data

- Large LCD display, digit height 15 mm
- Dimensions weighing surface, plastic, WxD 134x127 mm
- Overall dimensions WxDxH 145x205x46,5 mm
- Battery operation, 4x1.5 V AA standard, operating time up to 200 h. Integrated AUTO-OFF function to preserve the batteries
- Net weight approx. 0,45 kg
- Permissible ambient temperature 10 °C/40 °C

Note: The models with the suffix -S05 are delivered in a set of 5 units. i.e. the price given in the table refers to 5 items. Cannot be delivered individually

STANDARD



OPTION



Model	Weighing capacity [Max] g	Readability [d] g	Reproducibility g	Linearity g	Quantity delivered (balance)	Options
						Calibr. Certificate DAkKS accr. KERN
KERN						
EFS 500-2	500	0,01	0,01 g	± 0,03	1	963-127
EFS 200-1S05	220	0,1	0,1 g	± 0,3	5	963-127S05
EFS 600-1S05	620	0,1	0,1 g	± 0,3	5	963-127S05
EFS 3000-1	3000	0,1	0,1 g	± 0,3	1	963-127
EFS 2000-0S05	2200	1	1 g	± 3	5	963-127S05
EFS 5000-0S05	5200	1	1 g	± 3	5	963-128S05



Discover more details and matching accessories online!

Entry level laboratory balance with tremendous weighing performance

Features

- Simple and convenient 2-key operation
- Tare function facilitates formulation work
- Particularly flat design
- Ready for use: Batteries included
- **A** Ring-shaped draught shield standard, only for models with weighing plate size **A**, weighing space $\varnothing \times H$ 96×35 mm
- Hook for underfloor weighing standard
- **1** Also available as KERN EMB 500-1BE Black Edition
- Note: With the optional auxiliary set for density determination KERN YDB-04 also well suited for school and teaching operation, see *internet*

Technical data

- Large LCD display, digit height 15 mm
- Dimensions weighing surface
 - A** \varnothing 82 mm, plastic, with conductive lacquer
 - B** \varnothing 105 mm, plastic
 - C** \varnothing 150 mm, plastic, see larger picture
- Overall dimensions W×D×H
 - A** 170×244×54 mm
 - B, C** 170×244×39 mm
- Batteries included, 9 V block, respectively 2×1.5 V AA
- Net weight approx. 0,85 kg
- Permissible ambient temperature 5 °C/35 °C

STANDARD



OPTION



Model	Weighing capacity [Max] g	Readability [d] g	Reproducibility g	Linearity g	Weighing plate	Options
						Calibr. Certificate DAkkS accr. KERN
KERN						
EMB 100-3	100	0,001	0,001 g	± 0,005	A	963-127
EMB 200-3	200	0,001	0,001 g	± 0,005	A	963-127
EMB 200-2	200	0,01	0,01 g	± 0,02	B	963-127
EMB 600-2	600	0,01	0,01 g	± 0,03	B	963-127
EMB 1000-2	1000	0,01	0,01 g	± 0,05	C	963-127
EMB 2000-2	2000	0,01	0,01 g	± 0,05	C	963-127
EMB 500-1	500	0,1	0,1 g	± 0,2	C	963-127
EMB 500-1BE	500	0,1	0,1 g	± 0,2	C	963-127
EMB 1200-1	1200	0,1	0,1 g	± 0,3	C	963-127
EMB 3000-1	3000	0,1	0,1 g	± 0,3	C	963-127
EMB 6000-1	6000	0,1	0,1 g	± 0,3	C	963-128
EMB 2200-0	2200	1	1 g	± 2	C	963-127
EMB 5.2K1	5200	1	1 g	± 3	C	963-128
EMB 5.2K5*	5200	5	5 g	± 10	C	963-128

1 * ONLY WHILE STOCKS LAST



Discover more details and matching accessories online!

School balance with integrated density determination function

Features

- Thanks to the self-explanatory, graphic-assisted control panel, the density of solids and liquids can be determined in seconds, making them ideal for use in schools and universities. Note: Balance and appropriate set for density determination should be ordered at the same time, see *internet*
- Self-explanatory, graphic control panel
 - no learning time = reduces costs
 - ideal for untrained users
 - visualised process avoids operating errors

- The 4 steps are carried out from left to right:
 - 1 Tare the balance by pressing the [TARE] key
 - 2 Select density determination mode (solids/liquids)
 - 3 Weighing of samples/plummets in air
 - 4 Weighing of samples/plummets in liquid. The density will be shown on the display right away
- Particularly flat design
- Hook for underfloor weighing standard

Technical data

- Large LCD display, digit height 15 mm
- Dimensions weighing surface, plastic
 - A ø 82 mm
 - B ø 150 mm, see larger picture
- Overall dimensions W×D×H 175×250×55 mm
- Batteries included, 9 V block, operating time up to 12 h, AUTO-OFF function preserves the battery
- Net weight approx. 0,85 kg
- Permissible ambient temperature 5 °C/35 °C
- Also with carat weighing unit:
 - EMB 200-3V: [Max] 1000 ct/ [d] 0,005 ct
 - EMB 2000-2V: [Max] 10000 ct/ [d] 0,05 ct

STANDARD

OPTION

Model	Weighing capacity [Max] g	Readability [d] g	Reproducibility g	Linearity g	Weighing plate	Options
						Calibr. Certificate DAkkS accr. KERN
KERN EMB 200-3V	200	0,001	0,002 g	± 0,005	A	963-127
KERN EMB 2000-2V	2000	0,01	0,02 g	± 0,05	B	963-127



Discover more details and matching accessories online!

Entry level model in the low-cost range with large weighing plate

Features

- Especially suitable for use in schools and universities, for example for biology, chemistry, physics
- Large, shock proof weighing plate made of plastic
- Particularly flat design
- Ergonomically optimised key pad with large keys and a high-contrast LCD display
- Secure and non-slip positioning with rubber feet
- Adjusting program CAL for quick setting of the balance accuracy, external test weights at an additional price, see *test weights*
- **A** Draught shield standard for models with weighing plate size **A**, weighing space W×D×H 145×145×65 mm

Technical data

- Large LCD display, digit height 25 mm
- Dimensions weighing surface
 - A** ø 105 mm, plastic, with conductive lacquer
 - B** W×D 175×190 mm, plastic, see larger picture
- Overall dimensions W×D×H 200×280×65 mm
- Optional battery operation, 9 V block not included in scope of delivery, operating time up to 40 h
- Mains adapter external, standard
- Net weight approx. 1,4 kg
- Permissible ambient temperature 5 °C/35 °C

STANDARD



OPTION



Model	Weighing capacity [Max] g	Readability [d] g	Reproducibility g	Linearity g	Weighing plate	Options
						Calibr. Certificate DAkkS accr. KERN
KERN EMS 300-3	300	0,001	0,002 g	± 0,005	A	963-127
KERN EMS 3000-2	3000	0,01	0,02 g	± 0,05	B	963-127
KERN EMS 6K0.1	6000	0,1	0,1 g	± 0,3	B	963-128
KERN EMS 12K0.1	12000	0,1	0,1 g	± 0,3	B	963-128
KERN EMS 6K1	6000	1	1 g	± 3	B	963-128
KERN EMS 12K1	12000	1	1 g	± 3	B	963-128



Discover more details and matching accessories online!

The compact all-round model with robust stainless steel weighing plate for use in laboratories, industries, and for teaching

Features

- Thanks to its compact, robust design, its bright display and high precision, this range is ideal for use in laboratories, quality control, production as well in schools and universities for teaching
- Large, shock proof weighing plate made from stainless steel, can be removed and therefore is hygienic and easy to clean
- **1** Particularly flat design
- Ergonomically optimised key pad with large keys and a high-contrast LCD display
- **2** Secure and non-slip positioning with rubber feet
- Level indicator and levelling feet for precise levelling of the scale, fitted as standard, to give the most accurate weighing result
- Adjusting program CAL for quick setting of the balance accuracy, external test weights at an additional price, see *test weights*

Technical data

- Large backlit LCD display, digit height 22 mm
- Dimensions weighing surface, stainless steel
 - A** \varnothing 105 mm
 - B** WxD 120x120 mm, see larger picture
- Overall dimensions WxDxH 225x160x50 mm
- Optional battery operation, 2x1.5 V AA not included in scope of delivery, operating time up to 70 h
- Mains adapter external, standard
- Net weight approx. 0,50 kg
- Permissible ambient temperature 5 °C/40 °C

STANDARD



OPTION



Model	Weighing capacity [Max] g	Readability [d] g	Reproducibility g	Linearity g	Weighing plate	Options
						Calibr. Certificate DAkkS accr. KERN
EHA 500-2	500	0,01	0,03 g	± 0,03	A	963-127
EHA 500-1	500	0,1	0,3 g	± 0,3	A	963-127
EHA 1000-1	1000	0,1	0,3 g	± 0,3	B	963-127
EHA 3000-1	3000	0,1	0,3 g	± 0,3	B	963-127
EHA 3000-0	3000	1	3 g	± 2	B	963-127

WHEN DESIGN MEETS PERFORMANCE

Experience the KERN brand universe of the future with the innovative models in the KERN IoT Line – for modern, effective weighing. New pioneering KERN design, standardised and simplified operation, high levels of connectivity and stunning performance, and it works consistently across all devices. This is how we weigh today!



Performance

- + Cross-device functionality and protocols
- + Consistently reliable performance
- + The latest technologies
- + Cross-device functionality and protocols



Design

- + Trend-setting, high-quality KERN design
- + Recognisability through uniform product range
- + Reliable brand values are reflected visually and functionally in the product



Philosophy

- + Sustainable due to high energy efficiency
- + Standardisation of design components across all units
- + Controlled value chain
- + Tested and monitored technology for maximum user safety





Are you curious about the models in the KERN IoT range and what opportunities they offer?

Then take a look at the following pages, because thanks to new technologies such as KUP and KCP these models are perfectly equipped for the wide range of challenges of Industry 4.0



User Interface

- + Uniform, simplified user guidance
- + Problem-free commissioning, use and expansion
- + Cross-model software



Note: **KERN EasyDisplay** is the smart software solution for large-format displays in real time. Available free of charge and compatible with all models in the IoT range.



Service

- + Fast and competent help from our IoT specialists
- + Even more efficient repair process
- + Accessories can be flexibly combined




Note: Our KERN IoT accessories can be easily combined with all our IoT models.

Find the right printer and other practical accessories in *Accessories* and on the internet

ARE YOU READY?

With the KERN Universal Port (KUP) or the KERN Universal Module (KUM) and the KERN Communication Protocol (KCP) we ensure the perfect integration of your KERN balance into production or process chains for a complete, simplified work process. Can also be easily retrofitted without affecting the conformity evaluation.

Prepared for the future of weighing in the Internet of Things?
Get IoT ready – with the IoT models from KERN.

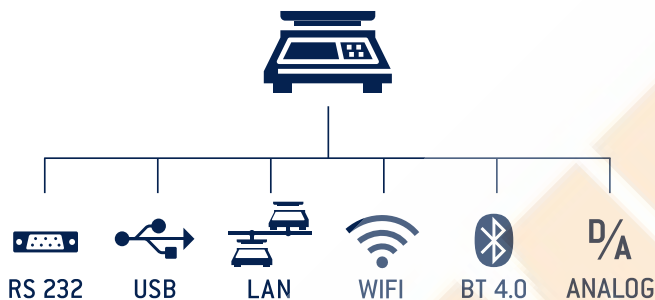

Robust industrial models from KERN for the very best integration into workflows



KERN Universal Port (KUP)


The KERN Universal Port (KUP) allows the connection of external KUP interface adapters such as RS-232, USB, Bluetooth, WiFi, Analogue, Ethernet etc.

The outstanding advantage here is that the KUP interface adapters are simply plugged in, i.e. retrofitting interfaces is conveniently possible without opening the scale housing or complicated installation.

The interface adapters enable convenient transmission of weighing data to networks, PCs, smartphones, tablets, laptops, printers etc. In addition, control commands and data inputs can also be sent to the scale via the connected devices.

The KERN Universal Module (KUM) is already built into the device and is particularly suitable for use in wet areas up to IP68.

KERN interface adapter

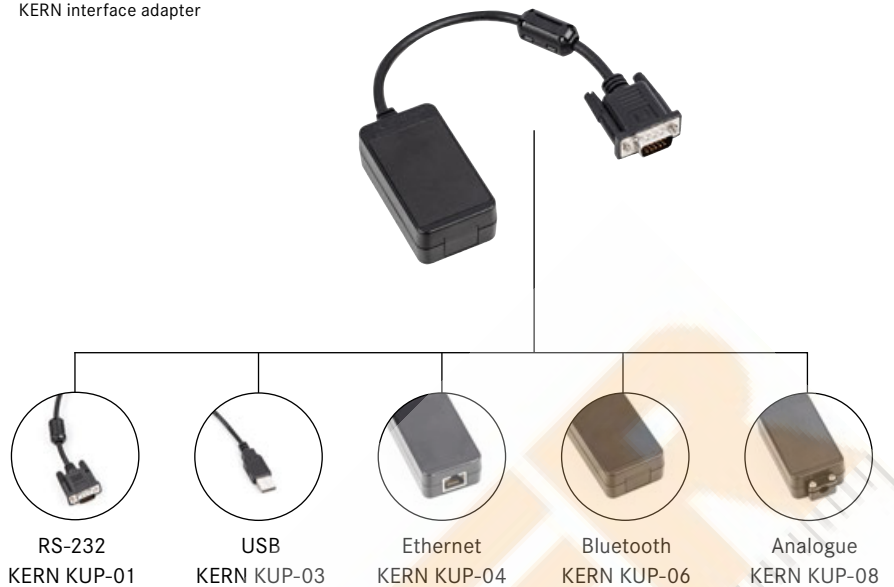

Still have questions?

We will be happy to give you more comprehensive information on this topic – talk to us:



Tip: With the KERN KUP-13 extension box, up to three KUP interface adapters can be operated in parallel on the scale.

KERN Communication Protocol (KCP)

The KERN Communication Protocol (KCP) permits searching and remote control of the balance through computers or CRM/ERP systems using the KERN Communication Protocol. KCP is a standardised interface command structure for KERN balances and other measuring instruments which allows you to recall and manage all relevant parameters and device functions. You can therefore simply connect KERN models with KCP to computers, industrial control systems and other digital systems.

In a large number of cases the KERN Communication Protocol is compatible with the MT-SICS protocol. KCP is available through all KUPs and KUMs.

KCP – Export (“Outbound”) – the Highlights

- Stable, immediate weight
- Live transfer of weights
- Storing of gross weight, tare weight, net weight, stability, date, time etc., in the tamper-proof Alibi memory
- Output of the weighing result in all available units, in percent and a free factor
- Output of the weighing result in pieces (piece counting function)
- Output of the weighing value at freely definable intervals
- and much more

KCP – Import (“Inbound”) – the Highlights

- Recall of the central device data
- Setup or recall of an individual device ID number
- Setting or searching for a tare value (pre-tare value) externally
- Recall of stored weighing results from the alibi memory
- Setting the reference values in the balance for outputting the weighing result in percent or in pieces
- Setting a network address for the balance (IP) – also for WiFi
- and much more