




## TORQUE SCREWDRIVERS



Versatile, accurate and easy torquing for smaller fasteners and restricted spaces

- Accuracy to  $\pm 6\%$  meets the requirements of ISO 6789-1:2017
- Supplied with  $\frac{1}{4}$ " hexagon bit holder
- Single scale, either N·m or lbf·in

NOTE: Bit set is only sold separately or as part of kit - see website for bit set details

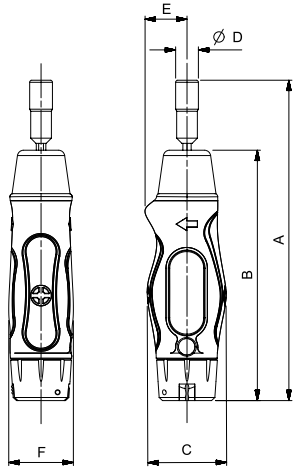

MODEL	ALL MODELS	
Dimensions (mm)	A	155
	B	121
	C	38
	$\varnothing D$	11
	E	20
	F	31
Weight (kg)	0.2	

### 2 ADJUSTABLE N·m

13850	TTs1.5, $\frac{1}{4}$ ", 0.3 - 1.5 N·m
13851	TTs3.0, $\frac{1}{4}$ ", 0.6 - 3 N·m
13852	TTs6.0, $\frac{1}{4}$ ", 1.2 - 6 N·m

### 2 ADJUSTABLE lbf·in

13853	TTs13, $\frac{1}{4}$ ", 2.5 - 13 lbf·in
13854	TTs26, $\frac{1}{4}$ ", 5 - 26 lbf·in
13855	TTs53, $\frac{1}{4}$ ", 10 - 53 lbf·in

### 2 PRODUCTION 'P' TYPE

13856	TTs1.5, $\frac{1}{4}$ ", 0.3 - 1.5 N·m, 2.5 - 13 lbf·in
13857	TTs3.0, $\frac{1}{4}$ ", 0.6 - 3 N·m, 5 - 26 lbf·in
13858	TTs6.0, $\frac{1}{4}$ ", 1.2 - 6 N·m, 10 - 53 lbf·in
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

### 2 ADJUSTABLE N·m KIT

13700	TTs0.3 - 1.5 N·m Kit with 12 piece bit set and case
13701	TTs0.6 - 3 N·m Kit with 12 piece bit set and case
13702	TTs1.2 - 6 N·m Kit with 12 piece bit set and case
28937	12 Piece $\frac{1}{4}$ ", Hex bit set

## PROFESSIONAL TORQUE WRENCHES MODEL 5




The Model 5 is a unique torque wrench that offers the convenience of interchangeable  $\frac{1}{4}$ " hexagon bits. (ISO 1173:2001 Form C drive bits).

- Accuracy meets the requirements of ISO 6789-1:2017
- Non-length dependent. The Model 5 remains accurate regardless of hand position
- Supplied in a storage case. The case allows space for the storage of additional drive bits

### 2 ADJUSTABLE

13001	Pro 5, $\frac{1}{4}$ " female hex, 1 - 5 N·m
13002	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 lbf·in
13003	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 kgf·cm

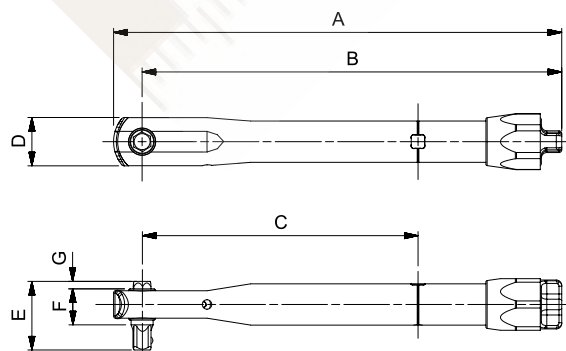

Also available as Production 'P' Types, preventing unauthorised alteration of torque setting. No external calibration equipment is required to set the Model 5 'P' Type.

### 2 PRODUCTION 'P' TYPE

13004	Pro 5, $\frac{1}{4}$ " female hex, 1 - 5 N·m
13005	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 lbf·in
13006	Pro 5, $\frac{1}{4}$ " female hex, 10 - 50 kgf·cm

### 8 MODEL 5 SPARES

28900	$\frac{1}{4}$ " Hex to $\frac{1}{4}$ " male square drive
-------	--



Model 5 'P' Type in storage case

Model	Adjustable	'P' Type	
Part Number	13001	13004	
	13002	13005	
	13003	13006	
	Dimensions (mm)	A	165
		B	155
		C	102
		D	18
E		25	
F	13		
G	2.8		
Weight (kg)	0.1	0.1	



SLIMLINE™ TORQUE WRENCHES



- Accurate to ±3% of reading which meets the requirements of ISO 6789-1:2017
- Unmistakable signal when set torque is reached
- High quality 72 tooth ratchet allows use in confined spaces
- Fixed head version has a push-through square for left and right handed torque tightening
- Moulded grip aids correct hand location and operator comfort



2	ADJUSTABLE RATCHET - DUAL SCALE
11123	SLO, ¼", 4 - 20 N·m, 40 - 180 lbf·in
11087	SLO, ⅜", 4 - 20 N·m, 40 - 180 lbf·in



2	ADJUSTABLE - FIXED HEAD - DUAL SCALE
11125	SLO, ⅜" fixed head, 4 - 20 N·m, 40 - 180 lbf·in

SLO Ratchet

Model	SLO ¼"	SLO ⅜"
Part Number	11123 11085	11087 11086
Dimensions (mm)	A	219
	B	204
	C	146
	ØD	30
	E	26
	F	19
Weight (kg)	0.4	0.4

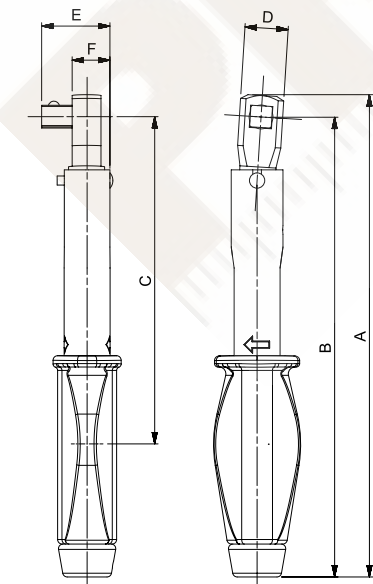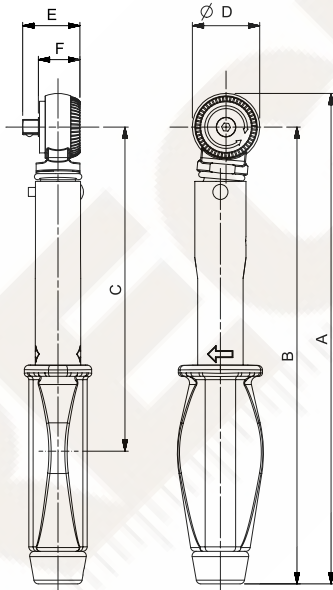

SLO Fixed Head

Model	SLO ⅜" Fixed Head	
Part Number	11125 11089	
Dimensions (mm)	A	213
	B	203
	C	145
	D	19
	E	30
	F	17
Weight (kg)	0.4	



2	TORQUE HANDLE ADJUSTABLE - DUAL SCALE
11126	SLO 16 mm spigot, 4 - 20 N·m, 40 - 180 lbf·in
11122	SLO 9 x 12 mm female, 4 - 20 N·m, 40 - 180 lbf·in



Production 'P' type versions are designed to discourage unauthorised alteration. They have no scale and so must be set against a torque measuring device such as Norbar's TruCheck™ 2 - see page 81.



2	PRODUCTION 'P' TYPE (Must be set using a Torque Tester, see pages 81-88)
11089	SLO, ⅜" fixed head, 4 - 20 N·m, 40 - 180 lbf·in
11085	SLO, ¼", 4 - 20 N·m, 40 - 180 lbf·in
11086	SLO, ⅜", 4 - 20 N·m, 40 - 180 lbf·in
11090	SLO, 16 mm spigot, 4 - 20 N·m, 40 - 180 lbf·in
11088	SLO, 9 x 12 mm female, 4 - 20 N·m, 40 - 180 lbf·in
SQ2222	Pre-set, etch and certify (Allow 3 days delivery for this service)

SLO Female Torque Handle

Model	SLO FTH	
Part Number	11122 11088	
Dimensions (mm)	A	205
	B	194
	C	135
	D	22
	E	20
Weight (kg)	0.4	

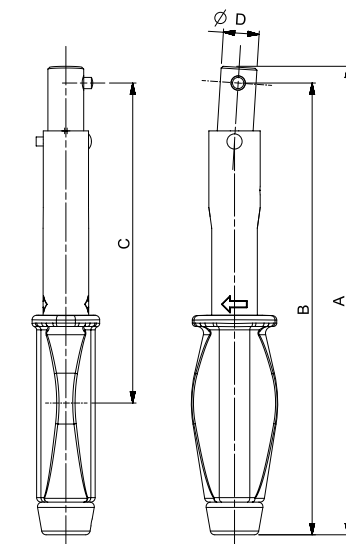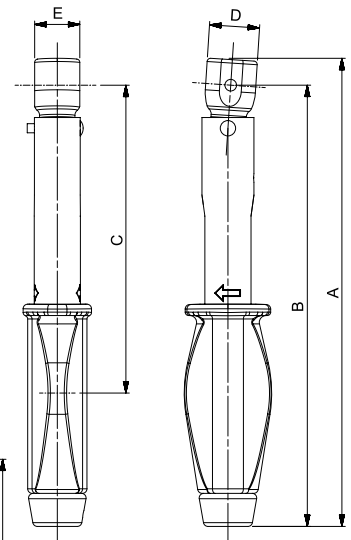

SLO Spigot Torque Handle

Model	SLO Spigot	
Part Number	11126 11090	
Dimensions (mm)	A	206
	B	199
	C	143
	ØD	16
Weight (kg)	0.4	