



SPARES FOR INSTRUMENTATION PRODUCTS

| 8 | SPARES FOR INSTRUMENTATION PRODUCTS |
|-------|--|
| 38876 | Rechargeable Battery Pack for Pro-Log, TST & TTT |
| 29610 | ¼" Female - ½" Male Sleeve Adaptor |
| 29611 | ½" Female - ¾" Male Sleeve Adaptor |
| 29612 | ½" Female - 1" Male Sleeve Adaptor |
| 29613 | ¾" Female - 1" Male Sleeve Adaptor |
| 29614 | ¾" Female - ½" Male Sleeve Adaptor |

| 4 | SERIAL DATA LEAD KIT |
|-------|----------------------|
| 60248 | Serial Data Lead Kit |

Note: Serial Data Lead Kit is not suitable for use with HE Instrument and TruCheck™ 2

60259 | USB to Serial Data Lead (Does not work with USM-3)
 This kit enables Norbar 'CE Marked' instruments (Post January 1996 ETS, TWA and DTS plus all Pro-Test, TST and TTT) to connect to most PCs.

PART NUMBER SUFFIX SYSTEM

Transducers can be ordered for use with Norbar's current range of instruments (TST, TTT, TTL-HE and T-Box™ 2), and as Industry Standard (mV/V calibrated) for certain display instruments from other manufacturers.

A part number suffix system is used to identify the type of calibration required. For example, a 1,000 N·m Static Transducer for use with a TTT instrument would become part number 50772.LOG.

| SUFFIX | USAGE | CERTIFIED IN |
|--------|---|--------------|
| .LOG | TST, TTT, TTL-HE & T-Box™ 2 | Torque Units |
| .IND | Instruments of non Norbar manufacture (check with Norbar for suitability) and TST, TTT, TTL-HE & T-Box™ 2 | mV/V |

Where the transducer suffix .LOG is used, the transducer is calibrated with an instrument, as a system, a calibration certificate is provided in torque units. A full scale mV/V figure is also supplied.

STATIC TRANSDUCER BENCH STANDS

| 4 | BENCH STANDS FOR STATIC TORQUE TRANSDUCERS |
|----------------|--|
| 50211 | Small frame size (10 N·m) ¼" sq. |
| 50212 | Small frame size (50 N·m) ⅜" sq. |
| 50213 | Small frame size (100/250 N·m) ½" sq. |
| 50220 | Large frame size (250/500 N·m) ¾" sq. |
| 50221 | Large frame size (1,000/1,500 N·m) 1" sq. |
| 50127.BLK9005* | Extra large size (7,000 N·m) 1½" sq. |
| 52014 | ¼" Insert for Small Bench Stands |
| 52015 | ⅜" Insert for Small Bench Stands |
| 52016 | ½" Insert for Small Bench Stands |
| 52017 | ¾" Insert for Large Bench Stands |
| 52018 | 1" Insert for Large Bench Stands |


* Dimensions available on request



Bench stands ensure the correct mounting of Norbar's Static Torque Transducers up to 7,000 N·m (5,000 lbf·ft).



| Model | Small Frame Size | Large Frame Size |
|-----------------|-------------------------|------------------|
| Part Number | 50211 50212 50213 | 50220 50221 |
| Dimensions (mm) | A | 70 |
| | B | 120 |
| | C | 150 |
| Weight (kg) | 0.8 | 2.5 |

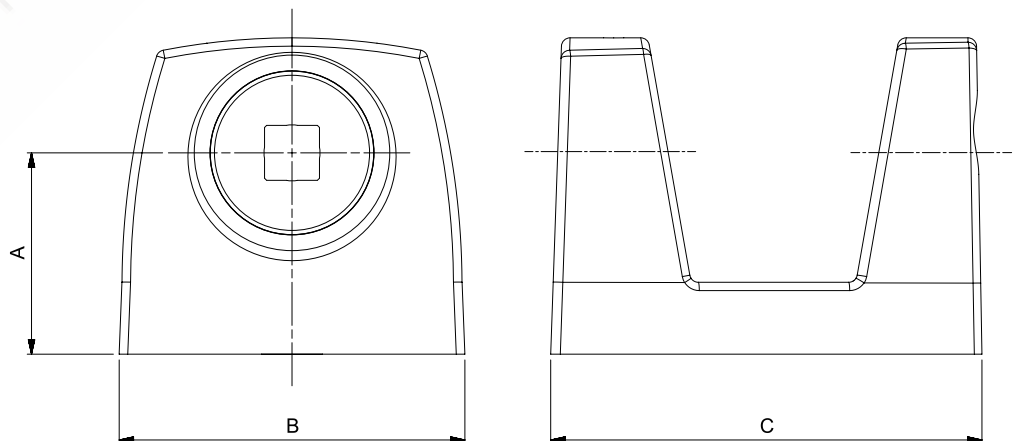



STATIC TRANSDUCERS



Calibration
details



The accuracy and quality of the Norbar Static Torque Transducers has made them the first choice of many calibration laboratories throughout the world. Up to 5,000 N·m (5,000 lbf·ft) classified to BS7882:2017, typically better than Class 1 for the primary classification range ($\pm 0.5\%$ of reading from 20% to 100% of full scale).

- Robust, heat treated, alloy steel torsion shaft design
- Designed to ignore non-torsional forces
- Operates in clockwise and counter-clockwise directions
- Calibration up to 100,000 N·m with a UKAS accredited certificate
- Calibrated in clockwise direction as standard. Counter-clockwise provided on request

- Smart transducers have a built in memory circuit which contains essential information about the transducer. This information can be read by Norbar's TST, TTT, TTL-HE & T-Box™ 2 instruments meaning that when the transducer is connected, it is immediately recognised and ready for use.

Static Transducers ¼" through to 1"

| 4 | STATIC TRANSDUCERS - 0.1 - 1,500 N·m | |
|------------|--------------------------------------|--------|
| 50587.xxx* | 0.1 - 1 N·m | ¼" M/F |
| 50588.xxx | 0.25 - 2.5 N·m | ¼" M/F |
| 50589.xxx | 0.5 - 5 N·m | ¼" M/F |
| 50590.xxx | 1 - 10 N·m | ¼" M/F |
| 50591.xxx | 2.5 - 25 N·m | ⅜" M/F |
| 50592.xxx | 5 - 50 N·m | ⅜" M/F |
| 50593.xxx | 10 - 100 N·m | ½" M/F |
| 50594.xxx | 25 - 250 N·m | ½" M/F |
| 50701.xxx | 25 - 250 N·m | ¾" M/F |
| 50849.xxx | 35 - 350 N·m | ½" M/F |
| 50596.xxx | 50 - 500 N·m | ¾" M/F |
| 50772.xxx | 100 - 1,000 N·m | 1" M/F |
| 50766.xxx | 150 - 1,500 N·m | 1" M/F |

| 4 | STATIC TRANSDUCERS - 0.1 - 1,000 lbf·ft | |
|-----------|---|--------|
| 50611.xxx | 0.1 - 1 lbf·ft | ¼" M/F |
| 50615.xxx | 0.5 - 5 lbf·ft | ¼" M/F |
| 50618.xxx | 1 - 10 lbf·ft | ¼" M/F |
| 50620.xxx | 2.5 - 25 lbf·ft | ⅜" M/F |
| 50836.xxx | 5 - 50 lbf·ft | ½" M/F |
| 50624.xxx | 10 - 100 lbf·ft | ½" M/F |
| 50625.xxx | 25 - 250 lbf·ft | ½" M/F |
| 50702.xxx | 25 - 250 lbf·ft | ¾" M/F |
| 50627.xxx | 50 - 500 lbf·ft | ¾" M/F |
| 50773.xxx | 100 - 1,000 lbf·ft | 1" M/F |

| 4 | STATIC TRANSDUCERS - 1 - 1,000 lbf·in | |
|------------|---------------------------------------|--------|
| 50610.xxx* | 1 - 10 lbf·in | ¼" M/F |
| 50612.xxx | 2.5 - 25 lbf·in | ¼" M/F |
| 50614.xxx | 5 - 50 lbf·in | ¼" M/F |
| 50617.xxx | 10 - 100 lbf·in | ¼" M/F |
| 50619.xxx | 25 - 250 lbf·in | ⅜" M/F |
| 50621.xxx | 50 - 500 lbf·in | ⅜" M/F |
| 50623.xxx | 100 - 1,000 lbf·in | ½" M/F |

| 4 | STATIC TRANSDUCERS - 10 - 100 ozf·in | |
|------------|--------------------------------------|--------|
| 50609.xxx* | 10 - 100 ozf·in | ¼" M/F |


xxx Indicates .LOG or .IND versions, please see page 89.

* .LOG versions not suitable for use with TST, TTT or TTL-HE, purchased pre Feb 2016.

@ UKAS accredited calibration up to 6,000 N·m. A non-accredited value at 7,000 N·m is extrapolated and provided for reference only.

+ UKAS accredited calibration up to 80,000 lbf·ft. A non-accredited value at 100,000 lbf·ft is extrapolated and provided for reference only.

| Model | ¼" M/F | ⅜" M/F | ½" M/F | ¾" M/F | 1" M/F | |
|-----------------|--|---|---|--|-------------------------------------|-----|
| Part Number | 50587.xxx 50588.xxx 50589.xxx 50590.xxx 50611.xxx 50615.xxx 50618.xxx 50610.xxx 50612.xxx 50614.xxx 50617.xxx 50609.xxx | 50591.xxx 50592.xxx 50620.xxx 50619.xxx 50621.xxx | 50593.xxx 50594.xxx 50849.xxx 50836.xxx 50624.xxx 50625.xxx 50623.xxx | 50701.xxx 50596.xxx 50702.xxx 50627.xxx | 50772.xxx 50766.xxx 50773.xxx | |
| Dimensions (mm) | ØA | 36 | 36 | 36 | 54 | 54 |
| | B | 33 | 33 | 33 | 42 | 42 |
| | C | 86 | 90 | 93 | 142 | 147 |
| | D | 10 | 13 | 16 | 24 | 29 |
| | E | 30 | 34 | 37 | 46 | 51 |
| | F | 6.5 | 10 | 13 | 22 | 26 |
| Weight (kg) | 0.6 | 0.6 | 0.6 | 1.5 | 1.7 | |

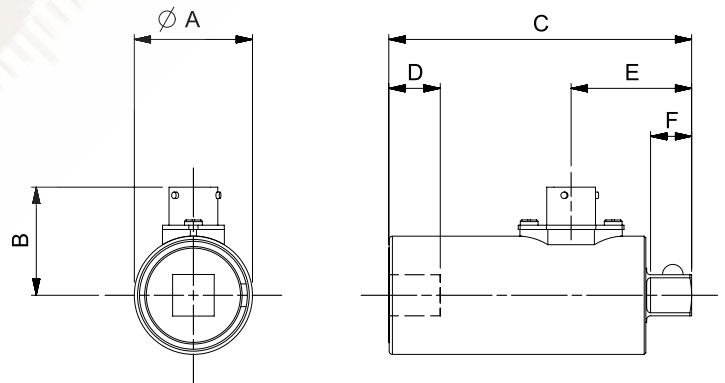

| 12 | TD2.CCW | |
|----|---|--|
| | Alternative calibration direction for transducers up to 1,500 N·m / 1,000 lbf·ft when ordered with new unit | |

| 12 | SECCAL.CW | |
|----|---|--|
| | Secondary calibration in one direction on static transducers with 2½" square drives to extend the range below 10% of the rated capacity, when ordered with new unit | |

| 12 | SECCAL.CW+CCW | |
|----|--|--|
| | Secondary calibration in two directions on static transducers with 2½" square drives to extend the range below 10% of the rated capacity, when ordered with new unit | |

| 12 | ADDCALPOINTS.NEW | |
|----|--|--|
| | Additional calibration steps below 10% of rated capacity to 2% for transducers up to 7,000 N·m (5,000 lbf·ft) when ordered with new unit | |



STATIC TRANSDUCERS



Calibration details

Static Transducers 1½" through to 3½" Male to Female (M/F)


| 4 | STATIC TRANSDUCERS - 250 - 7,000 N·m | |
|------------|--------------------------------------|---------|
| 50703.xxx | 250 - 2,500 N·m | 1½" M/F |
| 50791.xxx | 300 - 3,000 N·m | 1½" M/F |
| 50599.xxx | 500 - 5,000 N·m | 1½" M/F |
| 50669.xxx@ | 700 - 7,000 N·m | 1½" M/F |

| 4 | STATIC TRANSDUCERS - 250 - 5,000 lbf-ft | |
|-----------|---|---------|
| 50704.xxx | 250 - 2,500 lbf-ft | 1½" M/F |
| 50630.xxx | 500 - 5,000 lbf-ft | 1½" M/F |


| 4 | STATIC TRANSDUCERS - 1,000 - 100,000 N·m | |
|-----------|--|---------|
| 50776.xxx | 1,000 - 10,000 N·m | 2½" M/F |
| 50797.xxx | 2,500 - 25,000 N·m | 2½" M/F |
| 50781.xxx | 5,000 - 50,000 N·m | 2½" M/F |
| 50783.xxx | 8,000 - 80,000 N·m | 3½" M/F |
| 50816.xxx | 10,000 - 100,000 N·m | 3½" M/F |

| 4 | STATIC TRANSDUCERS - 1,000 - 60,000 lbf-ft | |
|-----------|--|---------|
| 50777.xxx | 1,000 - 10,000 lbf-ft | 2½" M/F |
| 50798.xxx | 2,500 - 25,000 lbf-ft | 2½" M/F |
| 50799.xxx | 3,000 - 30,000 lbf-ft | 2½" M/F |
| 50782.xxx | 6,000 - 60,000 lbf-ft | 3½" M/F |

| Model | 1½" M/F | 2½" M/F | 3½" M/F |
|-----------------|--|--|-------------------------------------|
| Part Number | 50703.xxx 50791.xxx 50599.xxx 50669.xxx 50704.xxx 50630.xxx | 50776.xxx 50797.xxx 50781.xxx 50777.xxx 50798.xxx 50799.xxx | 50783.xxx 50816.xxx 50782.xxx |
| Dimensions (mm) | ØA | 95 | 130 |
| | B | 59 | 80 |
| | C | 160 | 209 |
| | D | 41 | 59 |
| | E | 85 | 114 |
| | F | 38 | 57 |
| Weight (kg) | 4.5 | 11.5 | 16.5 |

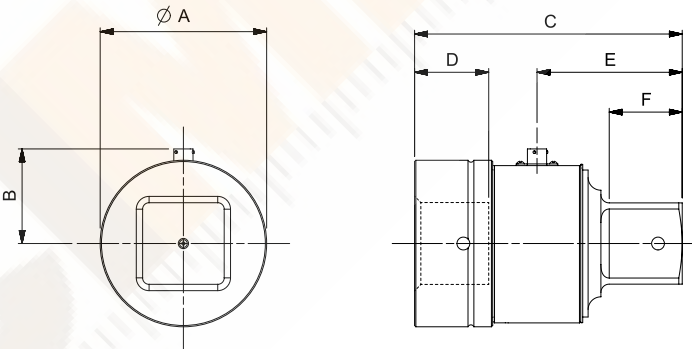

Static Transducers 2½" through to 3½" Male to Male (M/M)

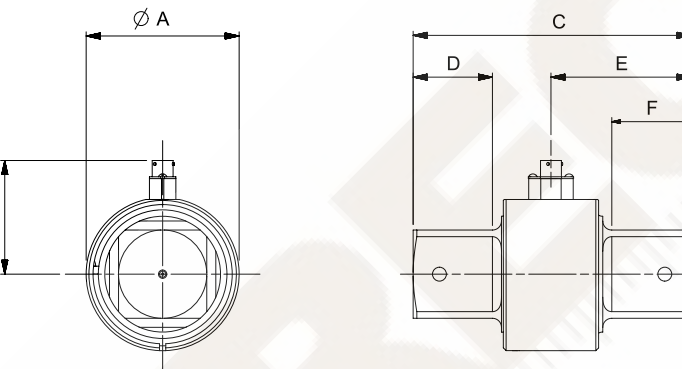

| | |
|----------|--|
| 12 | |
| TD5.CCW@ | Alternative calibration direction for transducers from 1,501 - 7,000 N·m / 1,001 - 5,000 lbf-ft when ordered with new unit |
| TD3.CCW+ | Alternative calibration direction for transducers from 7,001 - 100,000 N·m / 5,001 - 100,000 lbf-ft when ordered with new unit |

| Model | 2½" M/M | 3½" M/M |
|-----------------|------------------------|--|
| Part Number | 50603.xxx 50635.xxx | 50794.xxx 50796.xxx 50795.xxx 50637.xxx |
| Dimensions (mm) | ØA | 110 |
| | B | 82 |
| | C | 200 |
| | D | 57 |
| | E | 100 |
| | F | 57 |
| Weight (kg) | 11.5 | 16.5 |

| 4 | STATIC TRANSDUCERS - 2,500 - 100,000 N·m | |
|-----------|--|---------|
| 50603.xxx | 2,500 - 25,000 N·m | 2½" M/M |
| 50794.xxx | 5,000 - 50,000 N·m | 3½" M/M |
| 50796.xxx | 10,000 - 100,000 N·m | 3½" M/M |

| 4 | STATIC TRANSDUCERS - 2,500 - 100,000 lbf-ft | |
|------------|---|---------|
| 50635.xxx | 2,500 - 25,000 lbf-ft | 2½" M/M |
| 50795.xxx | 5,000 - 50,000 lbf-ft | 3½" M/M |
| 50637.xxx+ | 10,000 - 100,000 lbf-ft | 3½" M/M |

| 4 | STATIC TRANSDUCERS - 15,000 - 200,000 N·m | |
|---|---|---------|
| - | 15,000 - 150,000 N·m | 4½" M/M |
| - | 20,000 - 200,000 N·m | 4½" M/M |