

HANGING SCALES, CRANE SCALES

Laboratory | Industry | Food Industry

PROFESSIONAL MEASURING



2025

KERN Piktogram:

 CAL INT	Belső jusztírozó automatika (CAL) A pontosság beállítása egy belső, motorral mozgatott jusztírozó súllyal történik.	 PCS	Darbszámlálás A referencia darabszám választható. A kijelzés átkapcsolása darabszámról súlyra.	 UNDER	Horoggal végzett mérések A mérleg alsó felén is lehetőség van a terhelésre.
 CAL EXT	Jusztírozó program (CAL) A pontossági beállításhoz külső súly szükséges.	 RECIPE A	Receptúra A tára-edény súlya és a recept összetevői számára külön tárolóval (nettó összesen)	 BATT	Elemes működés A mérleg elemmel (is) működik. Az elem típusa a mérleg típusától függ.
 MEMORY	Memória. A mérleg beépített memóriával rendelkezik. Pl. sorszám, tömeg, tárazási tömeg stb. PLU	 RECIPE B	Receptúra Belső memória a recepteknek névvel, cél-értékkel és az összetevőkkel. Felhasználói útmutatás a kijelzőn keresztül.	 ACCU	Akkumulátoros működés Újratölthető készlet.
 ALIBI	ALIBI MEMORY A mérési eredmények elektronikus elérése összhangban a 2009/23/EC szabvánnyal.	 RECIPE C	Receptúra Belső memória a recepteknek névvel, cél-értékkel és az összetevőkkel. Felhasználói útmutatás a kijelzőn keresztül. Kényelmi funkciók, mint pl.: vonalkód és visszazárolási funkció.	 MULTI	Univerzális adapter: univerzális bemenet, cserélhető szabványos dugvillák az alábbi szabványok szerint: A) EU, GB B) EU, GB, CH, USA C) EU, GB, CH, USA, AUS
 RS 232	RS-232 adat-interfész A mérleg csatlakoztatására nyomtatóhoz, PC-hez vagy hálózathoz.	 SUM	Össztömeg meghatározás A tételek tömegét összeadja és az összesített értéket kinyomtatja.	 230 V	230V/50Hz Szabványos kialakítás, Németország, Magyarország. Rendelhető angol, amerikai vagy ausztrál kialakítás is.
 RS 485	RS-485 adat-interfész A mérleg csatlakoztatására nyomtatóhoz, PC-hez vagy egyéb periférikus eszközhöz. Az elektromágneses zavarokra kevésbé érzékeny.	 KCP	KERN Kommunikációs Protokoll KCP KERN mérlegekhez és más műszerekhez használható szabványos adatátviteli lehetőség A Kern KCP-s eszközök könnyen kapcsolhatóak PC-khez, PLC-khez és más rendszerekhez.	 230 V	Hálózati kábel 230V/50Hz, Németország, Magyarország. Rendelhető angol, amerikai vagy ausztrál kialakítás is.
 USB	USB adat-interfész A mérleg csatlakoztatására nyomtatóhoz, PC-hez vagy egyéb periférikus eszközhöz.	 DMS	Erőmérő cella	 BT	Bluetooth adat-interfész Adatok átvitelére nyomtatóra, PC-re vagy egyéb periférikus eszköze
 WLAN	Wifi adat-interfész Adatok átvitelére nyomtatóra, PC-re vagy egyéb periférikus eszköze.	 PERCENT	Százalék meghatározás A célértéktől (100%) való eltérés kijelzése %-ban.	 T-FORK	Rezgővillás technológia Rövid beállási idő, gyors mintavételezés.
 SWITCH	Kontrol kimenet Optocsatoló, digitális I/O Csatlakozás relékhez, ellenőrző Impákhhoz, szelepekhez stb.	 UNIT	Súlymértékegységek Gombnyomással átváltható pl. nem metrikus mértékegységekre. Lásd a mérlegmodellt.	 FORCE	Elektromágneses erő kompenzáció
 DUAL	Interfész második mérleghez Közvetlen kapcsolat egy második mérleghez.	 TOL	Mérés tűréshatárral A felső és az alsó határérték külön programozható. Pl. adagolásnál/válogatásnál és osztályozásnál.	 SC TECH	Monoblokk cella Az erőkompenzációs eljárás továbbfejlesztett változata. Nagyobb precizitás.
 LAN	Hálózati interfész A mérleg csatlakoztatására egy Ethernet hálózathoz. A KERN mérlegekhez univerzális RS-232/LAN konverter is használható.	 MOVE	Rezgés-mentes mérés (Állatmérő program) A rezgés kiszűréssel stabil mérés érhető el.	 M +3 DAYS	Hitelesíthető mérleg A várható átfutási időt a piktogram mutatja. Kérjen tájékoztatást a Precimer Kft.-től.
 KUP	KERN Univerzális Port (KUP): adatátviteli lehetőség KUP interfészekkel (pl. RS-232, USB, Bluetooth, WLAN, Ananlóg, Ethernet) adatcserével	 IP	Por és folyadék elleni védettség, IPxx A piktogram mutatja a védettség mértékét. Pl. IP67	 DAKKS +3 DAYS	DAKKS kalibrálás kérhető A várható átfutási időt a piktogram mutatja. Kérjen tájékoztatást a Precimer Kft.-től.
 GLP INTERN	GLP /ISO jegyzőkönyvezés A mérési adatok megjelenítése dátummal órával nyomtatótól függetlenül.	 EASY-T	Easy Touch Kapcsolódás Kapcsolódás, adatátvitel és kontrol PC-hez, táblagéphez és okos telefonhoz.	 DAY	A várható szállítási időt a piktogram mutatja. Kérjen tájékoztatást a Precimer Kft.-től.
 GLP PRINTER	GLP /ISO jegyzőkönyvezés A mérési adatok megjelenítése dátummal órával. Csak KERN nyomtatókkal.	 INOX	Rozsdamentes acél A mérleg korrózió ellen védett.	 DAYS	Raklap szállítmány A várható szállítási időt a piktogram mutatja. Kérjen tájékoztatást a Precimer Kft.-től.
 ANALOG	Analóg interfész Megfelelő periférikus eszközökhöz való kapcsolódás analóg mérésekhez.			 ISO +10 DAYS	Gyári kalibrálás (ISO) A várható átfutási időt a piktogram mutatja. Kérjen tájékoztatást a Precimer Kft.-től.

PRECIMER KFT.

 info@precimer.hu

 <https://precimer.hu>

 <https://facebook.com/Precimer.Kft>

PRECIMER

Mérőeszközök, mérlegek, súlyok kereskedelme, kalibrálása, hitelesítése

Számlázási cím: 1163 Budapest, Fuvallat utca 53.

Iroda és labor: 1163 Budapest, Cziráki utca 32.

Telefon: +36-1-273-1006, +36-1-383-7705

Fax: +36-1-383-1985





The classic among manual hanging scales – perfect for rapid weighing of higher loads

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be “frozen” in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Peak load display (peak hold)
- Hook made of steel

Technical data

- LCD display, digit height 11 mm
- **2** Tape measure, extractable, length approx. 100 cm
- Ready for use: Batteries included, 9 V block, operating time up to 20 h
- Weighing units: kg, lb, N
- Overall dimensions W×D×H 90×30×283 mm
- Net weight approx. 0,35 kg
- Permissible ambient temperature 5 °C/35 °C

Accessories

- **3** Tare pan with pan beam, max. load 30 kg, details see *Accessories*, KERN CH-A01N, € 88,-


STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Price excl. of VAT ex works €	Options	
				DAKKS KERN	Calibr. Certificate €
KERN CH 15K20	15	20	72,-	963-128H	124,-
KERN CH 50K50	50	50	78,-	963-128H	124,-
KERN CH 50K100	50	100	68,-	963-128H	124,-



User-friendly hanging scale for rapid, mobile weighing

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- HDB-XL: High-capacity XL-version. The larger design creates space for a large handle, which enables even better handling especially with heavier loads
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be “frozen” in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Hook, steel, included with the delivery. Can be hinged on HDB-N models
- Peak load display (peak hold)

Technical data

- LCD display, digit height 12 mm
- Ready for use: Batteries included, 2×1.5 V AAA, operating time up to 180 h
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/35 °C

Accessories


- **2** Tare pan with pan beam, max. load 30 kg, details see *Accessories*, KERN CH-A01N, € 88,-

15



Model	Weighing capacity	Readability	Dimensions	Net weight	Price excl. of VAT ex works	Options	
						DAkKS	Calibr. Certificate
	[Max] kg	[d] g	W×D×H mm	approx. kg	€	KERN	€
KERN							
HDB 5K5N	5	5	72×25×188	0,20	62,-	963-127H	103,-
HDB 10K10N	10	10	72×25×188	0,20	62,-	963-128H	124,-
High-capacity XL-version							
HDB 6K-3XL*	6	5	101×25×203	0,25	82,-	963-128H	124,-
HDB 10K-2XL	15	10	101×25×203	0,25	82,-	963-128H	124,-
HDB 30K-2XL	30	20	101×25×211	0,25	82,-	963-128H	124,-

1 * ONLY WHILE STOCKS LAST

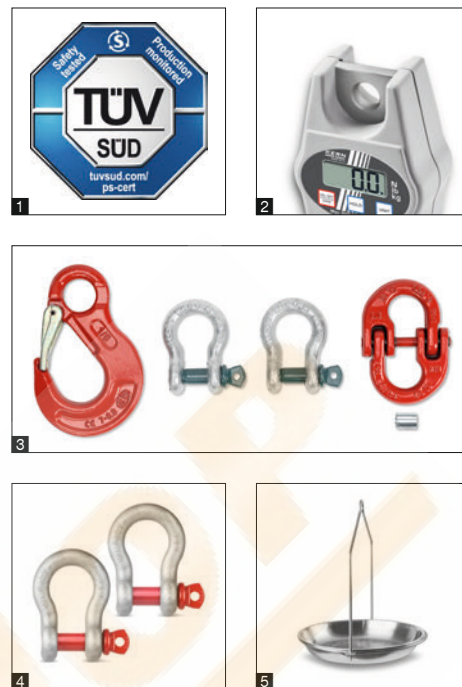

Handy hanging scale for higher loads

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be "frozen" in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Peak load display (peak hold), Measuring frequency 5 Hz
- [Max] ≤ 200 kg: Snap link (stainless steel) with safety catch and hook (stainless steel) as standard, see larger picture

- **2** [Max] ≥ 500 kg: Reinforced version for heavy loads. Snap link and hook not included, see *Accessories*

Technical data

- LCD display, digit height 12 mm
- Hole diameter of load support, model with [Max] ≤ 200 kg: approx. 14 mm [Max] ≥ 500 kg: approx. 16 mm
- Weighing units: kg, lb, N
- Ready for use: Batteries included, 3×1.5 V AA, operating time up to 300 h
- Permissible ambient temperature 5 °C/35 °C

Accessories

Suitable for all models

- **3** Hook with safety catch, galvanised and lacquered cast steel, not rotatable, scope of delivery: 2 shackles, 1 connecting link, 1 hook, KERN YHA-06, € 140,-
- **4** High-strength shackle, hot-dipped galvanised cast steel bracket, curved edge. Scope of delivery: 2 shackles, KERN YSC-04, € 60,-

Suitable for all models with [Max] ≤ 200 kg

- Snap link (stainless steel) with safety catch, opening approx. 13 mm, KERN HCB-A01, € 35,-
- Hook (stainless steel), opening approx. 29 mm, KERN HCB-A02, € 35,-

Suitable for model HCB 20K10

- **5** Tare pan with pan beam, max. load 30 kg, details see *Accessories*, KERN CH-A01N, € 88,-

STANDARD



OPTION



Model	Weighing capacity	Readability	Dimensions housing W×D×H mm	Net weight approx. kg	Price excl. of VAT ex works €	Options	
						DAKKS KERN	Calibr. Certificate €
KERN	[Max] kg	[d] g					
HCB 20K10	20	10	82×43×153	0,30	115,-	963-128H	124,-
HCB 50K20	50	20	82×43×153	0,30	125,-	963-128H	124,-
HCB 99K50	99	50	82×43×153	0,30	105,-	963-129H	145,-
HCB 50K100	50	100	82×43×153	0,30	95,-	963-128H	124,-
HCB 200K100	200	100	82×43×153	0,30	125,-	963-129H	145,-
HCB 100K200	100	200	82×43×153	0,30	105,-	963-129H	145,-
HCB 200K500	200	500	82×43×153	0,30	100,-	963-129H	145,-
HCB 0.5T-3	500	1000	82×43×153	0,40	205,-	963-130H	255,-
HCB 1T-3	1000	2000	82×48×153	0,60	265,-	963-130H	255,-



Robust, compact hanging scale with high level of protection against dust and water spray

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- **2** Housing stainless steel, IP65-protected against dust and water splashes
- Ideal for rapid control in goods-in and goods-out
- Also essential in the private sector to determine the weight of fish, game, fruits, bicycle parts, suitcases etc.
- Hold function: For easy reading of the weighing result, the display can be “frozen” in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Peak load display (peak hold)
- Internal measuring frequency: 5 Hz
- Snap link (stainless steel) with safety catch as standard
- Hook (stainless steel) as standard

Technical data

- LCD display, digit height 12 mm
- **3** Second display on the back of the balance, see larger picture
- Hole diameter of load support ca. 14 mm
- Ready for use: Batteries included, 2x1.5 V AA, operating time up to 200 h
- Weighing units: kg, lb, N
- Overall dimensions WxDxH 96x48x179 mm
- Net weight approx. 0,50 kg
- Permissible ambient temperature 5 °C/35 °C


Accessories

- Snap link (stainless steel) with safety catch, opening approx. 13 mm, KERN HCB-A01, € 35,-
- Hook (stainless steel), opening approx. 29 mm, KERN HCB-A02, € 35,-

15

STANDARD							OPTION

Model	Weighing capacity [Max] kg	Readability [d] g	Price excl. of VAT ex works €	Options	
				DAkkS KERN	Calibr. Certificate €
KERN HCN 50K100IP	50	100	145,-	963-128H	124,-
KERN HCN 100K200IP	100	200	145,-	963-129H	145,-
KERN HCN 200K500IP	200	500	145,-	963-129H	145,-

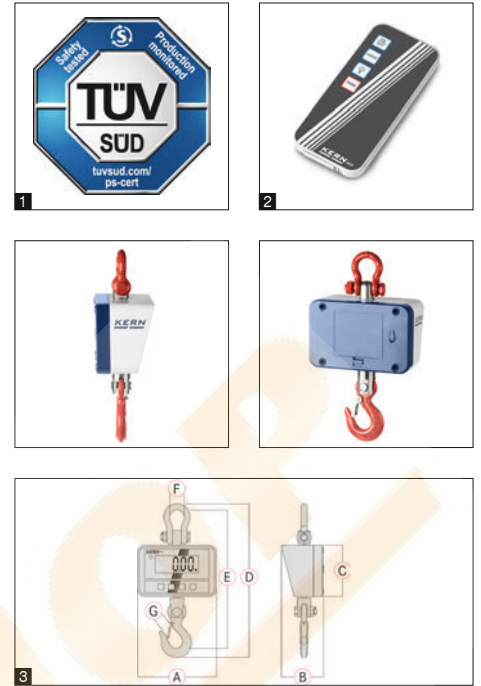

High-resolution crane scale for loads up to 300 kg

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- Fully-equipped crane scale for low to medium load ranges. The solid design guarantees that extra level of safety (TÜV tested). Thanks to the large LCD display and the remote control which is delivered as standard, it can also be operated safely from a distance and results can be read off
- Thanks to battery operation/rechargeable battery operation (optional), compact, light-weight construction, it is suitable for the use in several locations
- Battery level indicator, LED visual display

- Hold function: For easy reading of the weighing result, the display can be “frozen” in different ways. Either automatically when the weighing value remains unchanged or manually by pressing the Hold key
- Tare: Resets the display to “0” when there is a load on the scale. Now removed or added loads are directly displayed
- Large high-contrasted display that is easy to read
- Standby function: display automatically switched off after 5 min without a change of load. Automatic activation with the touch of a key
- Hook with safety catch, revolving
- Shackle and safety catch made of nickel-plated steel
- **2** Infrared remote control standard, range up to 20 m, W×D×H 65×24×100 mm, batteries included

Technical data


- Backlit LCD display, digit height 28 mm
- Ready for use: Batteries included, 4×1.5 V AA, operating time up to 100 h
- Precision: 0,2 % of [Max]
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/40 °C

Accessories

- Internal rechargeable battery pack for load receptor, operating time up to 50 h without backlight, charging time approx. 12 h. Weighing is not possible during the charging process, KERN HCD-A01, € 50,-



Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	Dimensions							Price excl. of VAT ex works €	Options		
				A mm	B mm	C mm	D mm	E mm	F mm	G mm		DAkkS Calibr. Certificate	Dakks Certificate	
KERN														
HCD 60K-2	60	20	1,2	150	79,3	97,7	276,1	246,5	26	18	200,-	963-129H	145,-	
HCD 100K-2	150	50	1,2	150	79,3	97,7	276,1	246,5	26	18	200,-	963-129H	145,-	
HCD 300K-1	300	100	1,2	150	79,3	97,7	276,1	246,5	26	18	200,-	963-129H	145,-	
Multi-division balance, with increasing or decreasing load, it switches automatically to the next largest or smallest weighing range [Max] and readout [d].														
HCD 100K-2D	60 150	20 50	1,2	150	79,3	97,7	276,1	246,5	26	18	210,-	963-129H	145,-	
HCD 300K-2D	150 300	50 100	1,2	150	79,3	97,7	276,1	246,5	26	18	210,-	963-129H	145,-	

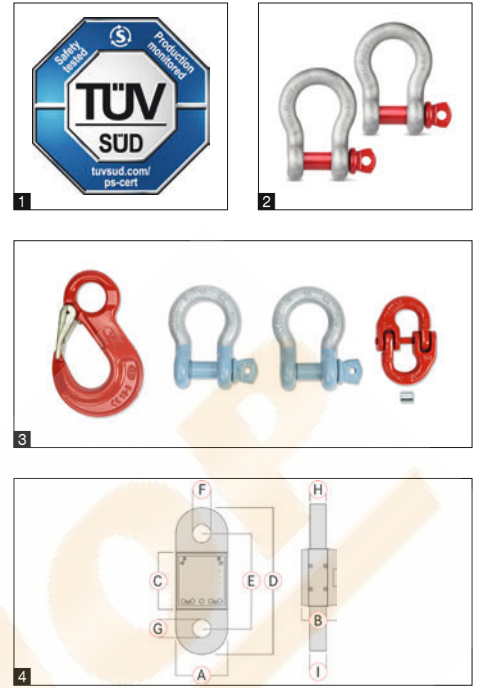

Compact crane scale with integrated display can also be used for tensile force measurement

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- With its high-quality finish, low weight and compact dimensions, this crane scale (tensile force gauge) is an essential device for industrial use
- Because of its compact design it is also ideally suited for installation in systems where space is limited, etc.
- Ideally suited for determining weight quickly while loading and unloading
- Peak load display (peak hold)
- Hold function: For easy reading of the weighing result, the display can be “frozen” by pressing the Hold key
- Tare: Resets the display to “0” when there is a load on the scale. Now removed or added loads are directly displayed

Technical data

- Large backlit LCD display, digit height 23 mm
- Material and design of housing/load support, models with [Max] ≤ 3 t: aluminium/stainless steel bushing [Max] > 3 t: steel/steel
- Rechargeable battery pack integrated, as standard, operating time up to 30 h without backlight, charging time approx. 12 h
- Optional battery operation, 3×1.5 V AA not included in scope of delivery, operating time up to 30 h
- Precision: 0,2 % of [Max]
- Internal measuring frequency: 60 Hz
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/35 °C

Accessories

- **2** High-strength shackle, hot-dipped galvanised cast steel bracket, bow shaped. Scope of delivery: 2 shackles with lacquered screw bolts, suitable for models with [Max] ≤ 5 t: KERN YSC-01, **€ 125,-** [Max] = 10 t: KERN YSC-02, **€ 270,-**
- **3** Hook with safety catch, galvanised and lacquered cast steel, not rotatable, scope of delivery: 2 shackles, 1 connecting link, 1 hook [Max] ≤ 1 t: KERN YHA-01, **€ 210,-** [Max] = 3 t: KERN YHA-02, **€ 230,-** [Max] = 5 t: KERN YHA-03, **€ 300,-** [Max] = 10 t: KERN YHA-04, **€ 560,-**

15


STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	4 Dimensions										Price excl. of VAT ex works €	Options	
				A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	DAkkS Calibr. KERN		Certificate €	
KERN HFA 600K-1	600	200	1,8	90	62	100	255	165	27	27	30	30	680,-	963-130H	255,-	
HFA 1T-4	1000	500	1,8	90	62	100	255	165	27	27	30	30	680,-	963-130H	255,-	
HFA 3T-3	3000	1000	2,0	90	62	100	255	165	27	27	30	30	740,-	963-132H	650,-	
HFA 5T-3	5000	2000	4,0	90	62	100	255	165	30	30	30	30	820,-	963-132H	650,-	
HFA 10T-3	10000	5000	6	90	72	100	275	185	40	40	40	40	1290,-	963-133H	910,-	

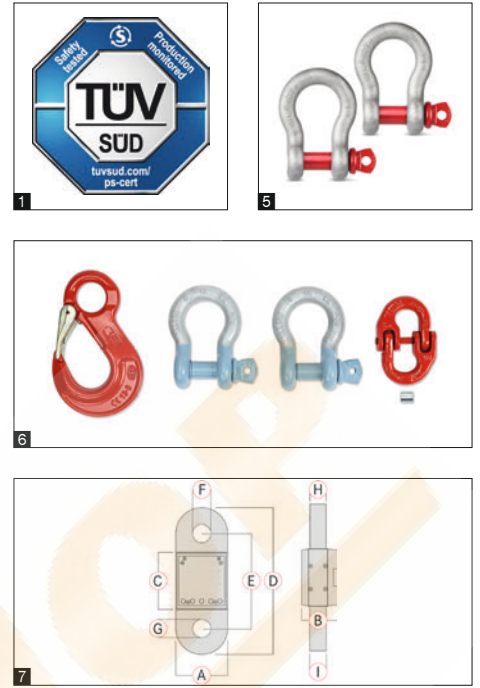

Compact crane scale for use in harsh environmental conditions or where space is limited, with convenient hand-held terminal

Features

- 1 With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- With its high-quality finish, low weight and compact dimensions, this crane scale (tensile force gauge) is an essential device for industrial use
- Because of its compact design it is also ideally suited for installation in systems where space is limited, etc.
- Peak load display (peak hold)
- Hold function: For easy reading of the weighing result, the display can be "frozen" by pressing the Hold key
- Tare: Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed
- Display device with integrated radio module, which the user can carry around with him, thanks to the convenient hand strap, standard. In this way the weighing data can always be read off the display device by the user, even

when the user is a long way from the load receptor (force gauge) or under poor lighting conditions. Range up to 20 m. All functions can be selected

Technical data

- Material and design of housing/load support, models with [Max] ≤ 3 t: aluminium/stainless steel bushing [Max] > 3 t: steel/steel
- Precision: 0,2 % of [Max]
- Internal measuring frequency: 10 Hz
- Weighing units: kg, lb, N
- Permissible ambient temperature 5 °C/35 °C

Display device

- Large backlit LCD display, digit height 23 mm
- 2 Rechargeable battery pack integrated, as standard, operating time up to 30 h without backlight, charging time approx. 12 h
- Dimensions of display device W×D×H 88×64×256 mm

Load receptor

- 3 Internal rechargeable battery pack included with the delivery, Operating time up to 35 h without backlight, charging time approx. 8 h
- 4 Optional battery operation, 3×1.5 V AA not included in scope of delivery, operating time up to 40 h

Accessories

- 5 High-strength shackle, hot-dipped galvanised cast steel bracket, bow shaped. Scope of delivery: 2 shackles with lacquered screw bolts, suitable for models with [Max] ≤ 5 t: KERN YSC-01, € 125,- [Max] = 10 t: KERN YSC-02, € 270,-
- 6 Hook with safety catch, galvanised and lacquered cast steel, not rotatable, scope of delivery: 2 shackles, 1 connecting link, 1 hook [Max] ≤ 1 t: KERN YHA-01, € 210,- [Max] = 3 t: KERN YHA-02, € 230,- [Max] = 5 t: KERN YHA-03, € 300,- [Max] = 10 t: KERN YHA-04, € 560,-

STANDARD



OPTION



Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	7 Dimensions										Price excl. of VAT ex works €	Options DAKKS Calibr. Certificate	
				A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	DAKKS KERN		€	
KERN HFC 600K-1	600	200	1,8	90	62	100	255	165	27	27	30	30	1070,-	963-130H	255,-	
HFC 1T-4	1000	500	1,8	90	62	100	255	165	27	27	30	30	1070,-	963-130H	255,-	
HFC 3T-3	3000	1000	2,2	90	62	100	255	165	27	27	30	30	1140,-	963-132H	650,-	
HFC 5T-3	5000	2000	4,0	90	62	100	255	165	30	30	30	30	1220,-	963-132H	650,-	
HFC 10T-3	10000	5000	6	90	72	100	275	185	40	40	40	40	1690,-	963-133H	910,-	



KERN HFD/HFD-IP




KERN HFD-M

Robust, high-resolution crane scale up to 12 t, also with optional verification or protection type IP67




High mobility: thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations (production, warehouse, dispatch department, etc.)

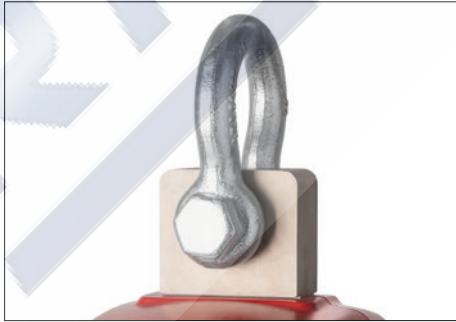

Solid shackles, non-revolving



Radio remote control standard. Range up to 20 m. All functions can be selected (excl. ON/OFF). W×D×H 65×24×100 mm. Batteries included, 1×12V, 23A

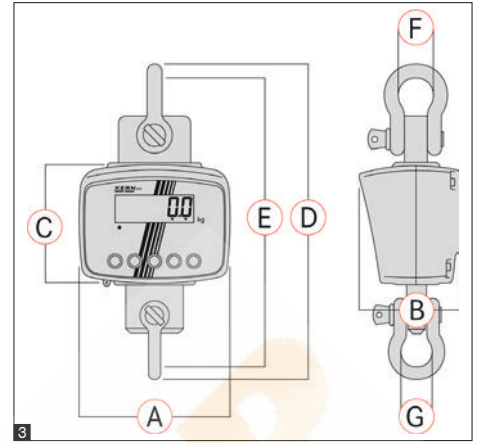

Features

- With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- Because of its stable construction and robust design, it is ideal for continuous use in industrial environment
- Tare: Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed

KERN HFD/HFD-IP

- Hold function: the weight display is "frozen" when the Hold button is pressed

KERN HFD-IP

- The models with IP add-on have special spray and dust protection to IP67 and because of this they are ideal for use in harsh environments

KERN HFD-M

- The models with M add-on can be verified optionally and because of this they are ideal for use in verified applications such as, for example, calculation of a total price, based on weight
- Will support you when weighing freight in a SOLAS compliant manner
- Sleep function: when the sleep button is pressed, the weight display is switched off, but the value remains stored. This can extend the battery life

Technical data

- Superior display size: digit height 30 mm, bright backlight for easy reading of weighing results, even in poor lighting conditions
- Rechargeable battery pack integrated, as standard, operating time up to 70 h without backlight, charging time approx. 12 h. Battery pack accessible from the outside, which means it is easy to replace
- Precision: 0,2 % of [Max]
- Weighing units: kg
- Permissible ambient temperature -10 °C/40 °C

Accessories

- Charging station for external battery charging, scope of delivery: charging station, exchangeable battery, mains adapter, KERN HFD-A07, € 120,-
- Hook with safety catch, cast steel, galvanised and lacquered, non-revolving, suitable for models
 [Max] ≤ 1t: KERN HFD-A01, € 50,-
 [Max] = 3t: KERN HFD-A02, € 70,-
 [Max] ≥ 6t: KERN HFD-A03, € 130,-

STANDARD: CAL EXT, SUM, IP 67, ACCU, MULTI, DMS, 1 DAY

OPTION: DAKKS +3 DAYS

FACTORY: M +3 DAYS HFD-M

Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	Dimensions						Price excl. of VAT ex works €	Verification M KERN €	Options	
				A mm	B mm	C mm	D mm	E mm	F=G mm			DAkkS KERN	Certificate €


Multi-range balance, with increasing load it switches automatically to the next largest weighing range [Max] and readout [d] and when the load is fully removed, the balance switches back to the lower range

HFD 600K-1	150 300 600	50 100 200	9	194	129	160	422	384	50,8	480,-	-	-	963-130H	255,-
HFD 1T-4	300 600 1500	100 200 500	9	194	129	160	422	384	50,8	490,-	-	-	963-130H	255,-
HFD 3T-3	600 1500 3000	200 500 1000	10	194	129	160	457	413	58	670,-	-	-	963-132H	650,-
HFD 6T-3	1500 3000 6000	500 1000 2000	15	194	129	160	518	467	68,3	850,-	-	-	963-132H	650,-
HFD 10T-3	3000 6000 12000	1000 2000 5000	22	194	129	160	584	521	82,5	990,-	-	-	963-133H	910,-
Protection against dust and water splashes IP67														
HFD 600K-1IP	150 300 600	50 100 200	9	194	129	160	422	384	50,8	590,-	-	-	963-130H	255,-
HFD 1T-4IP	300 600 1500	100 200 500	9	194	129	160	422	384	50,8	600,-	-	-	963-130H	255,-
HFD 3T-3IP	600 1500 3000	200 500 1000	10	194	129	160	457	413	58	740,-	-	-	963-132H	650,-
HFD 6T-3IP	1500 3000 6000	500 1000 2000	15	194	129	160	518	467	68,3	920,-	-	-	963-132H	650,-
HFD 10T-3IP	3000 6000 12000	1000 2000 5000	22	194	129	160	584	521	82,5	1060,-	-	-	963-133H	910,-

Note: For devices that require verification (conformity assessment according to NAWI 2014/31/EU), please include the verification when placing your order.

The initial verification is not possible after delivery. Please inform the full address of the location of use for the initial verification.

HFD 600K-1M	600	200	9	194	129	160	422	384	50,8	650,-	965-130H	150,-	963-130H	255,-
HFD 1T-4M	1500	500	9	194	129	160	422	384	50,8	660,-	965-130H	150,-	963-130H	255,-
HFD 3T-3M	3000	1000	10	194	129	160	457	413	58	860,-	965-132H	235,-	963-132H	650,-
HFD 6T-3M	6000	2000	15	194	129	160	518	467	68,3	1050,-	965-132H	235,-	963-132H	650,-
HFD 10T-3M	12000	5000	20	194	129	160	584	521	82,5	1200,-	965-133H	355,-	963-133H	910,-

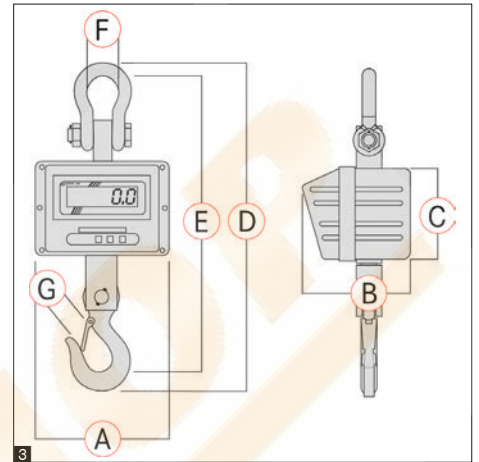

Robust industrial crane scale with bright LED display for optimum reading in unfavourable ambient conditions

Features

- **1** With the TÜV certification mark, the scales meet the requirements of the standard EN 13155 (Non-fixed load lifting attachments/ Breakage resistance) and EN 61010-1 (Electrical safety)
- Professional device for robust applications in production, quality control, logistics etc. Because of its stable construction and robust design, it is ideal for continuous use in industrial environment
- Thanks to rechargeable battery operation, compact, lightweight construction, it is suitable for the use in several locations
- Adaptation of the readout to unstable environmental conditions at the push of a button (you can select between 3 levels)
- Hold function: For easy reading of the weighing result, the display can be "frozen" by pressing the Hold key

- Tare: Resets the display to "0" when there is a load on the scale. Now removed or added loads are directly displayed
- Hook with safety catch, revolving
- **2** Radio remote control standard. Range up to 20 m. All functions can be selected (excl. ON/OFF). W×D×H 48×10×95 mm. Batteries included, 12 V, Typ 23A

Technical data

- Superior display size: digit height 30 mm, bright backlight for easy reading of weighing results, even in poor lighting conditions
- Rechargeable battery pack integrated, as standard, operating time up to 50 h without backlight, charging time approx. 14 h
- Precision: 0,2 % of [Max]
- Weighing units: kg
- Permissible ambient temperature 0 °C/40 °C

15

STANDARD

CAL EXT ACCU MULTI DMS 1 DAY 2 DAYS

OPTION



DAkkS +3 DAYS

HFM 10T1

Model	Weighing capacity [Max] kg	Readability [d] g	Net weight approx. kg	3 Dimensions							Price excl. of VAT ex works €	Options	
				A mm	B mm	C mm	D mm	E mm	F mm	G mm		DAkkS KERN	Certificate €
HFM 1T0.1	1000	100	14	270	200	175	610	540	68	40	1010,-	963-130H	255,-
HFM 3T0.5	3000	500	16	270	200	175	610	540	74	40	1040,-	963-132H	650,-
HFM 5T0.5	5000	500	18	300	230	190	730	650	74	55	1400,-	963-132H	650,-
HFM 10T1	10000	1000	34	300	230	190	840	750	92	60	1860,-	963-133H	910,-

KERN:

Kern & Sohn GmbH. alapítva 1844, Németország. Gyári hitelesítő és kalibráló labor



PRECIMER KFT.

kernshop@precimer.hu

<https://kernshop.hu>

<https://www.facebook.com/kernshop>

KERNSHOP

Kiemelt hivatalos képviselet

Szaküzlet és labor: 1163 Budapest, Cziráki utca 32.

Telefon: +36-1-273-1006, +36-1-608-6114

Nyitvatartás: munkanapokon 8:00 - 16:00

PRECIMER

Kereskedelmi és Szolgáltató Kft.



Értékesítés, tanácsadás, szerviz, hitelesítő labor.

